


AS Assignment for Routers

Bradley Huffaker
bradley@caida.org

Amogh Dhamdhere, Marina Fomenkov, kc claffy


CAIDA
University of California
at San Diego, La Jolla, CA

PAM -- April 7-9, 2010




Overview

- motivation
- methodology
- analysis
- conclusions





AS Assignment Problem

Which AS, 32 or 12, owns/controls the router **a**?

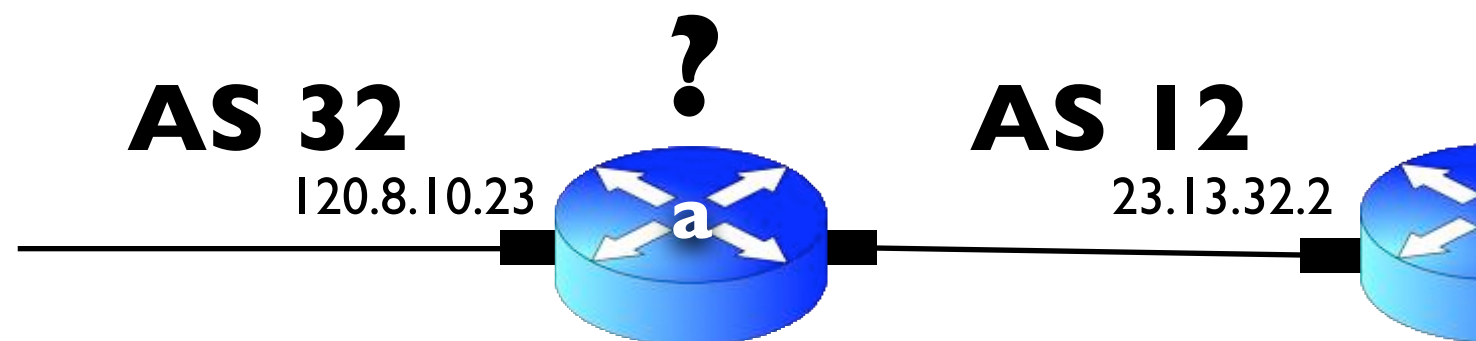

IP address	120.8.10.23	23.13.32.2
prefix	120.8.10.0/24	23.13.0.0/16
AS	32	12
router	?	

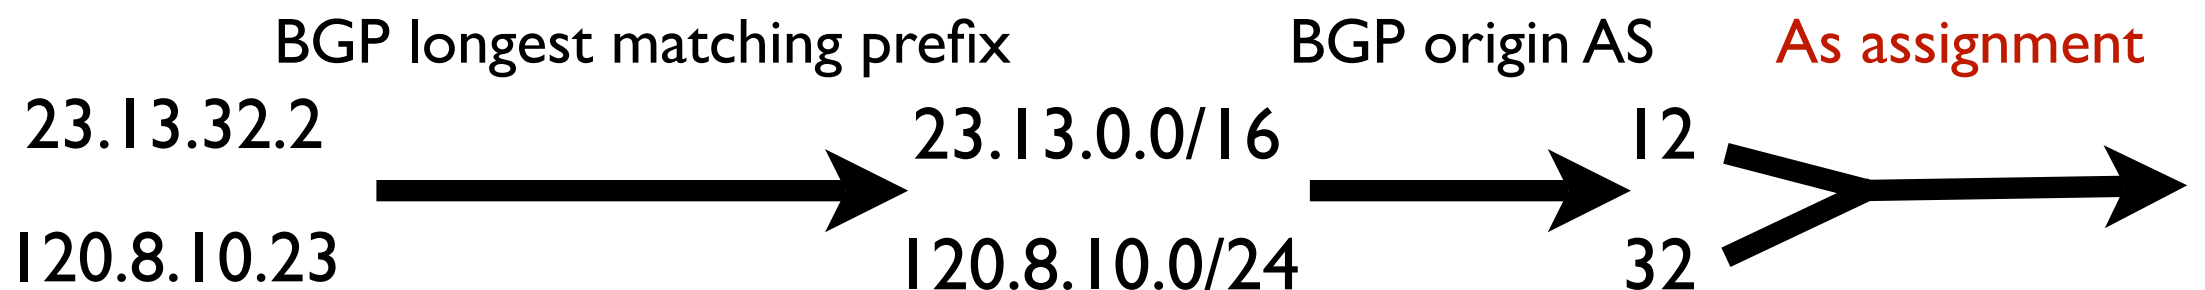




Motivation


motivation


- Dual graph
 - a combined router and AS graph
- Dual graph analysis
 - Relationship between AS degree and the AS's number of routers.
 - how does heuristic assignment affect the inferred number of routers in an AS
- More accurate AS traceroute
 - resolving AS loops



Here is What We Want


Dual Router and AS graph

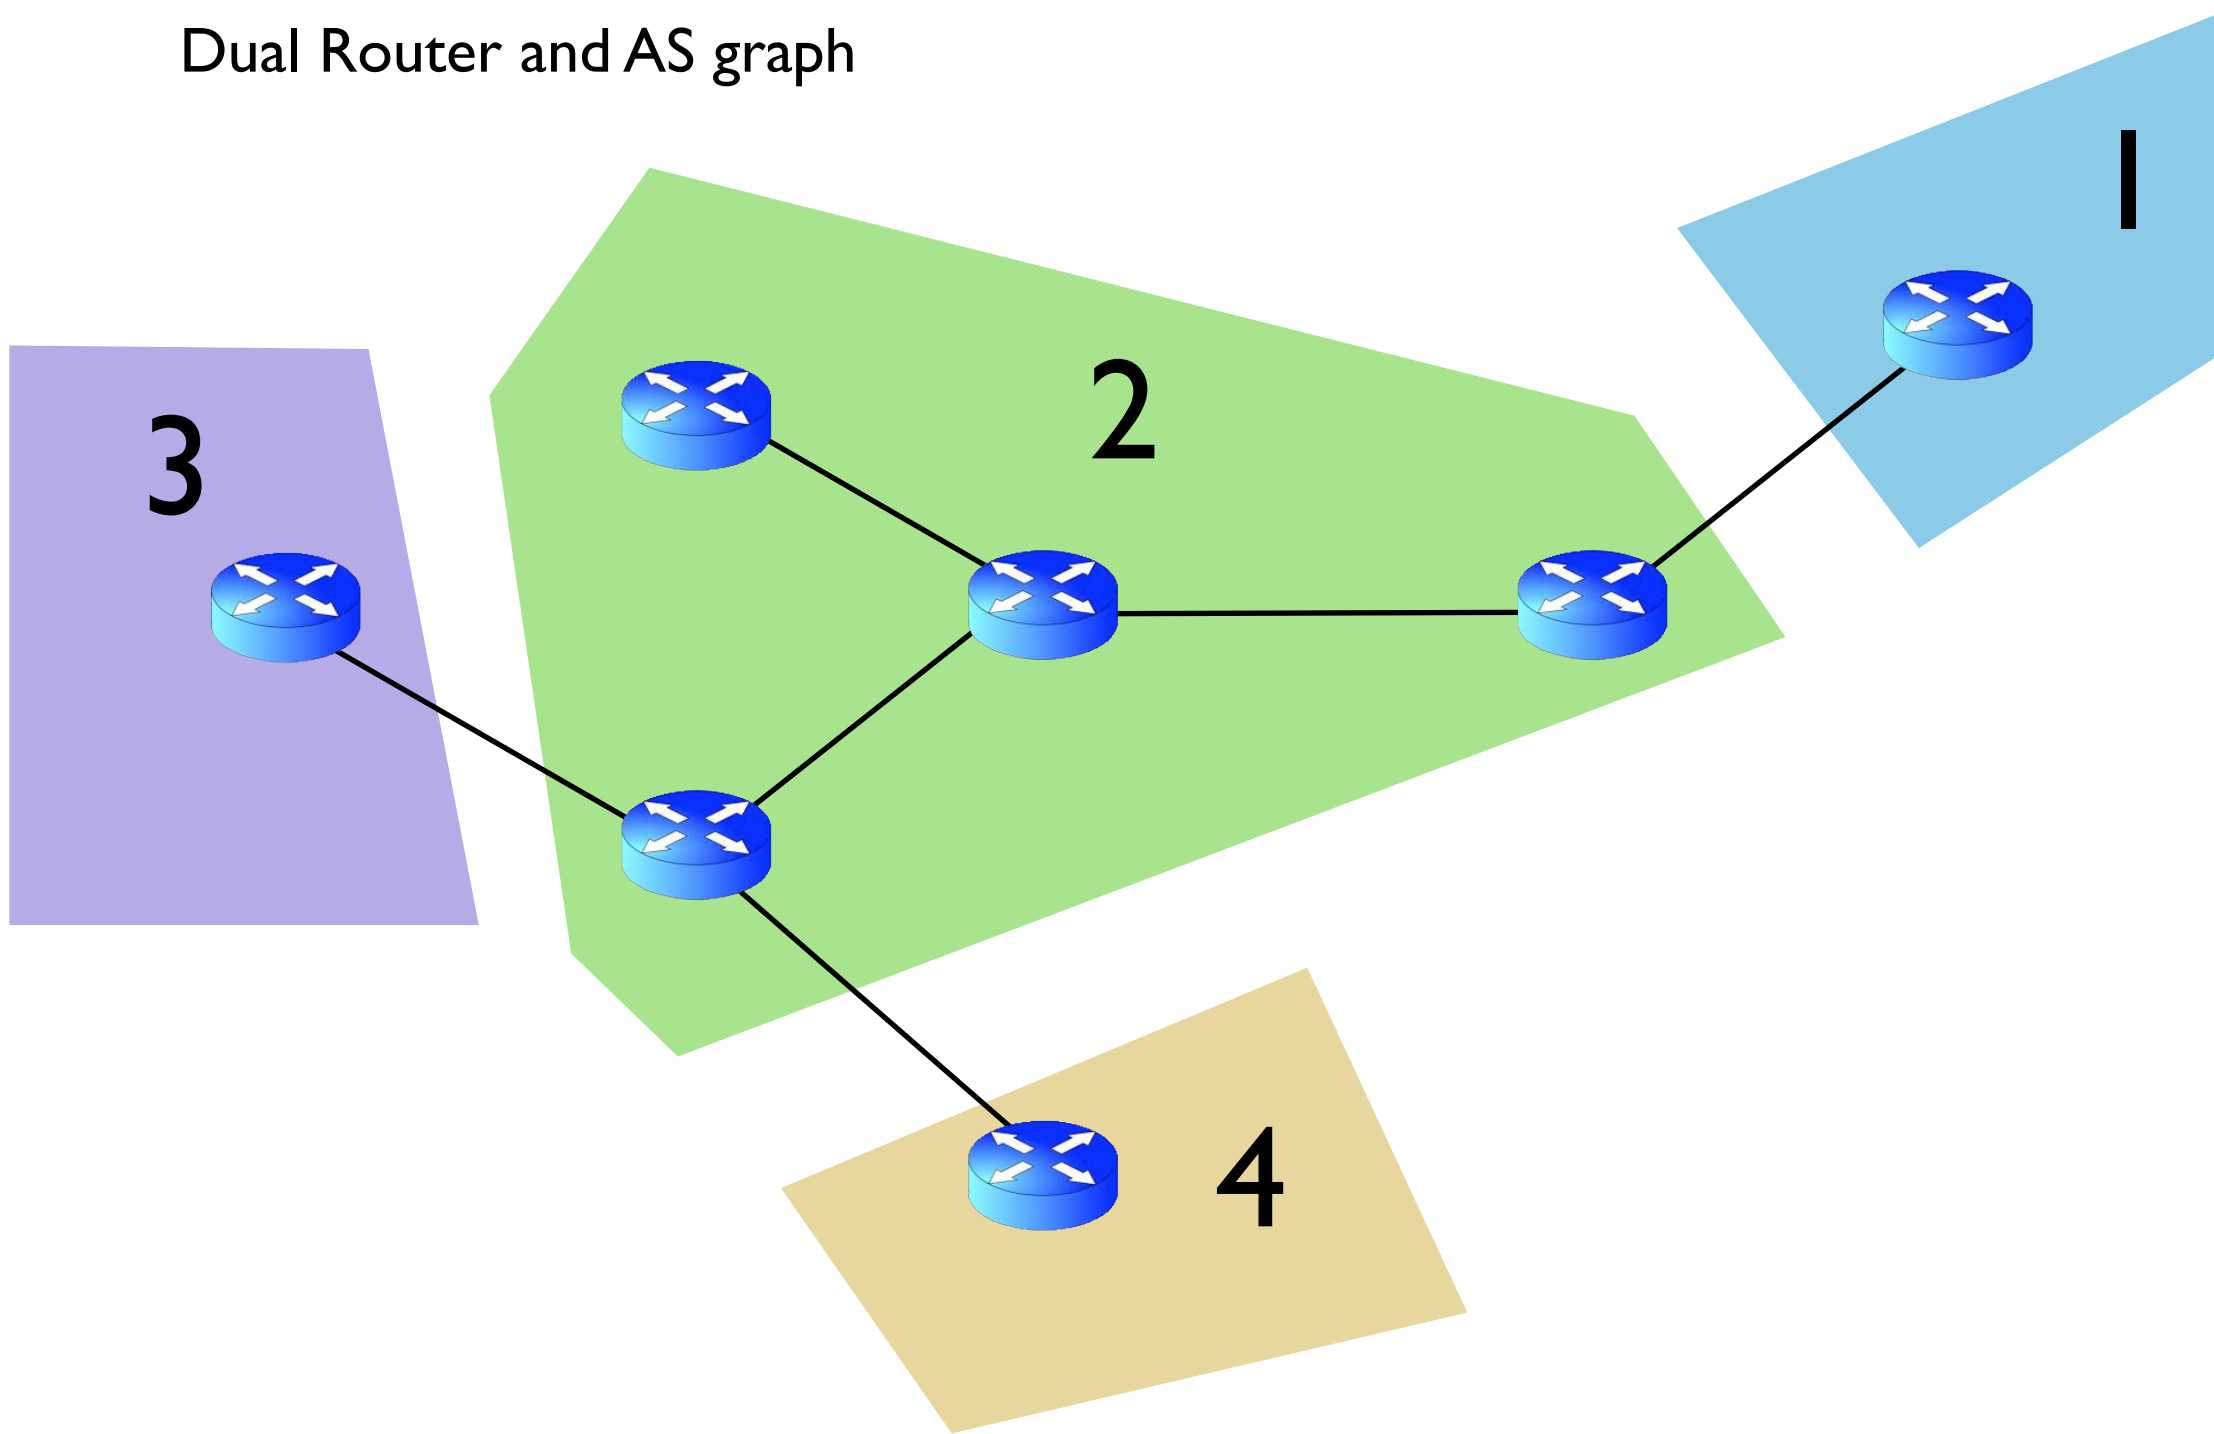




This is What We Have


Router graph with interfaces.

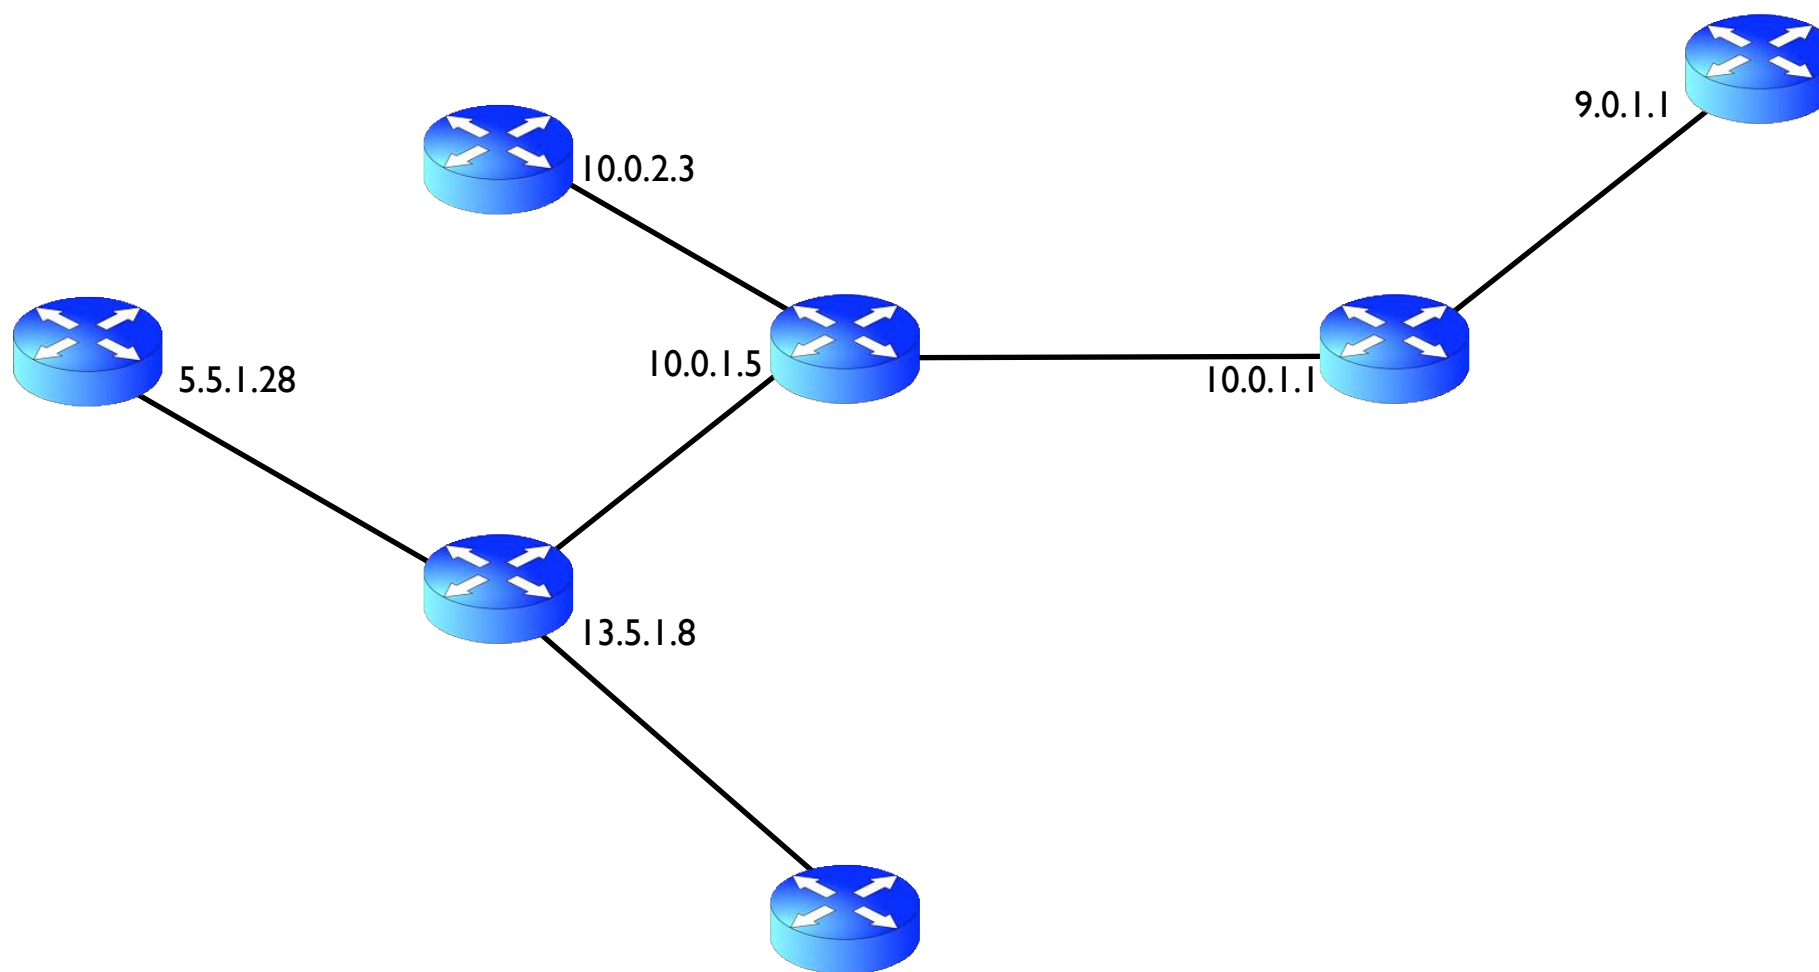




Mapping to Prefix


Router graph with prefixes assigned to links.

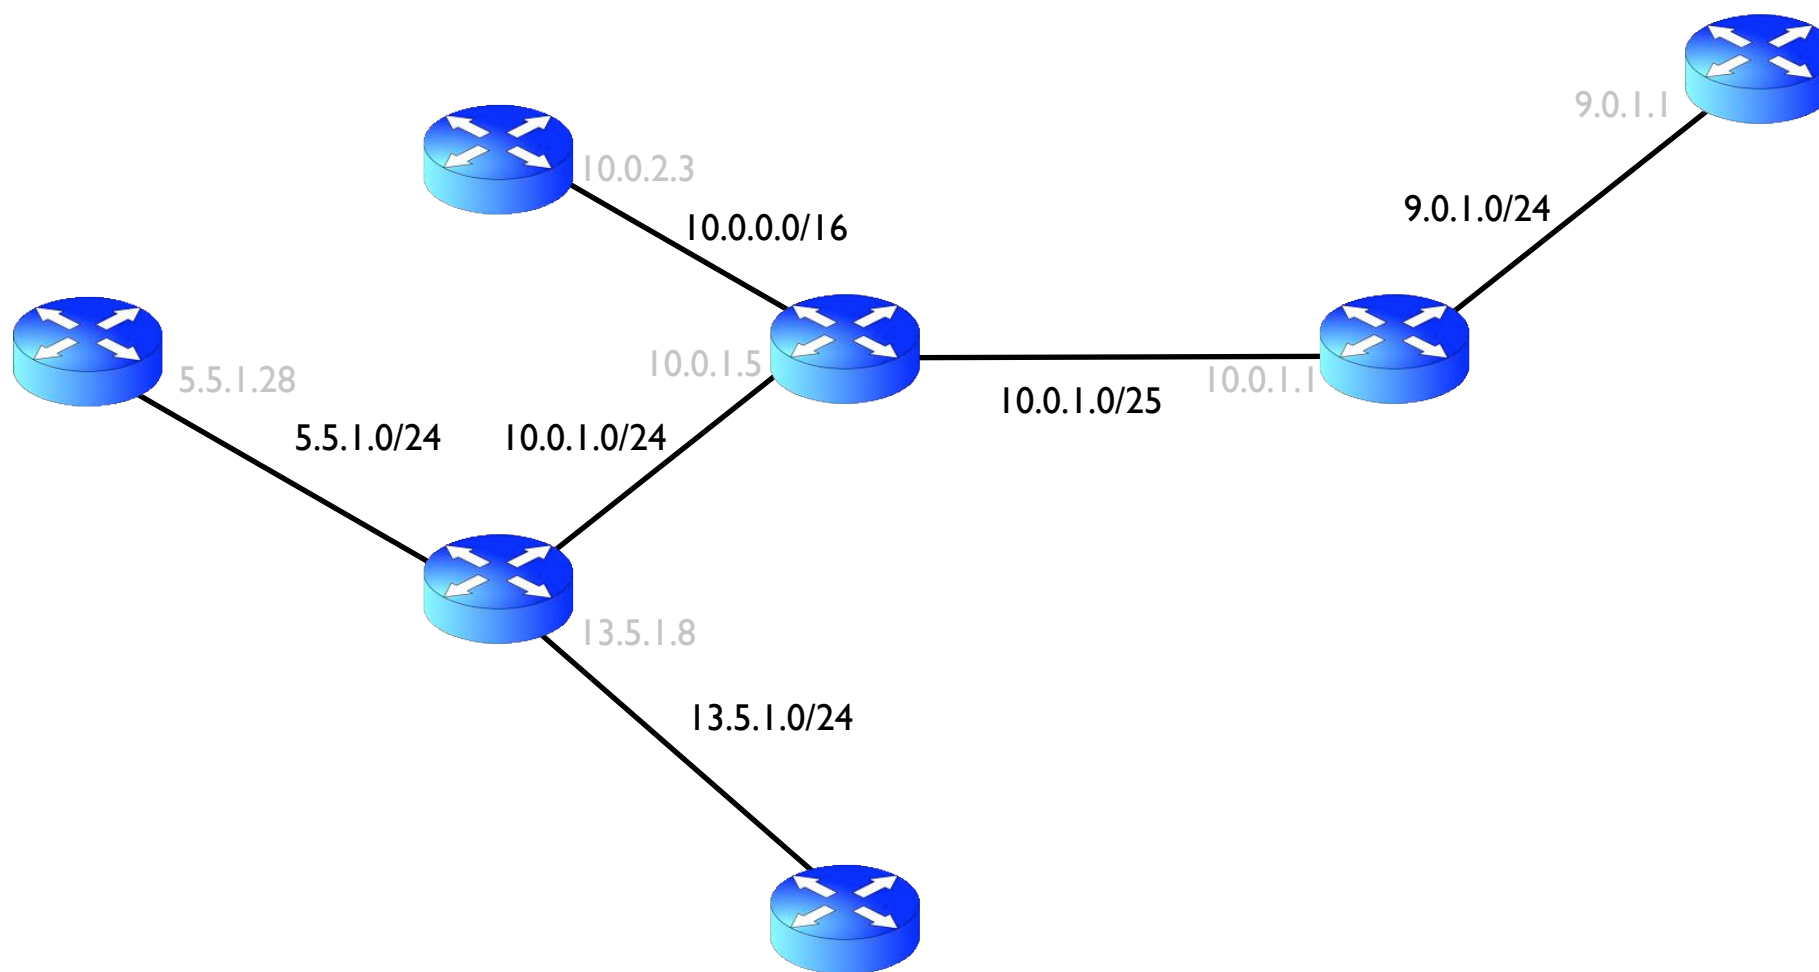




Mapping to ASes


Router graph with AS assigned to links.

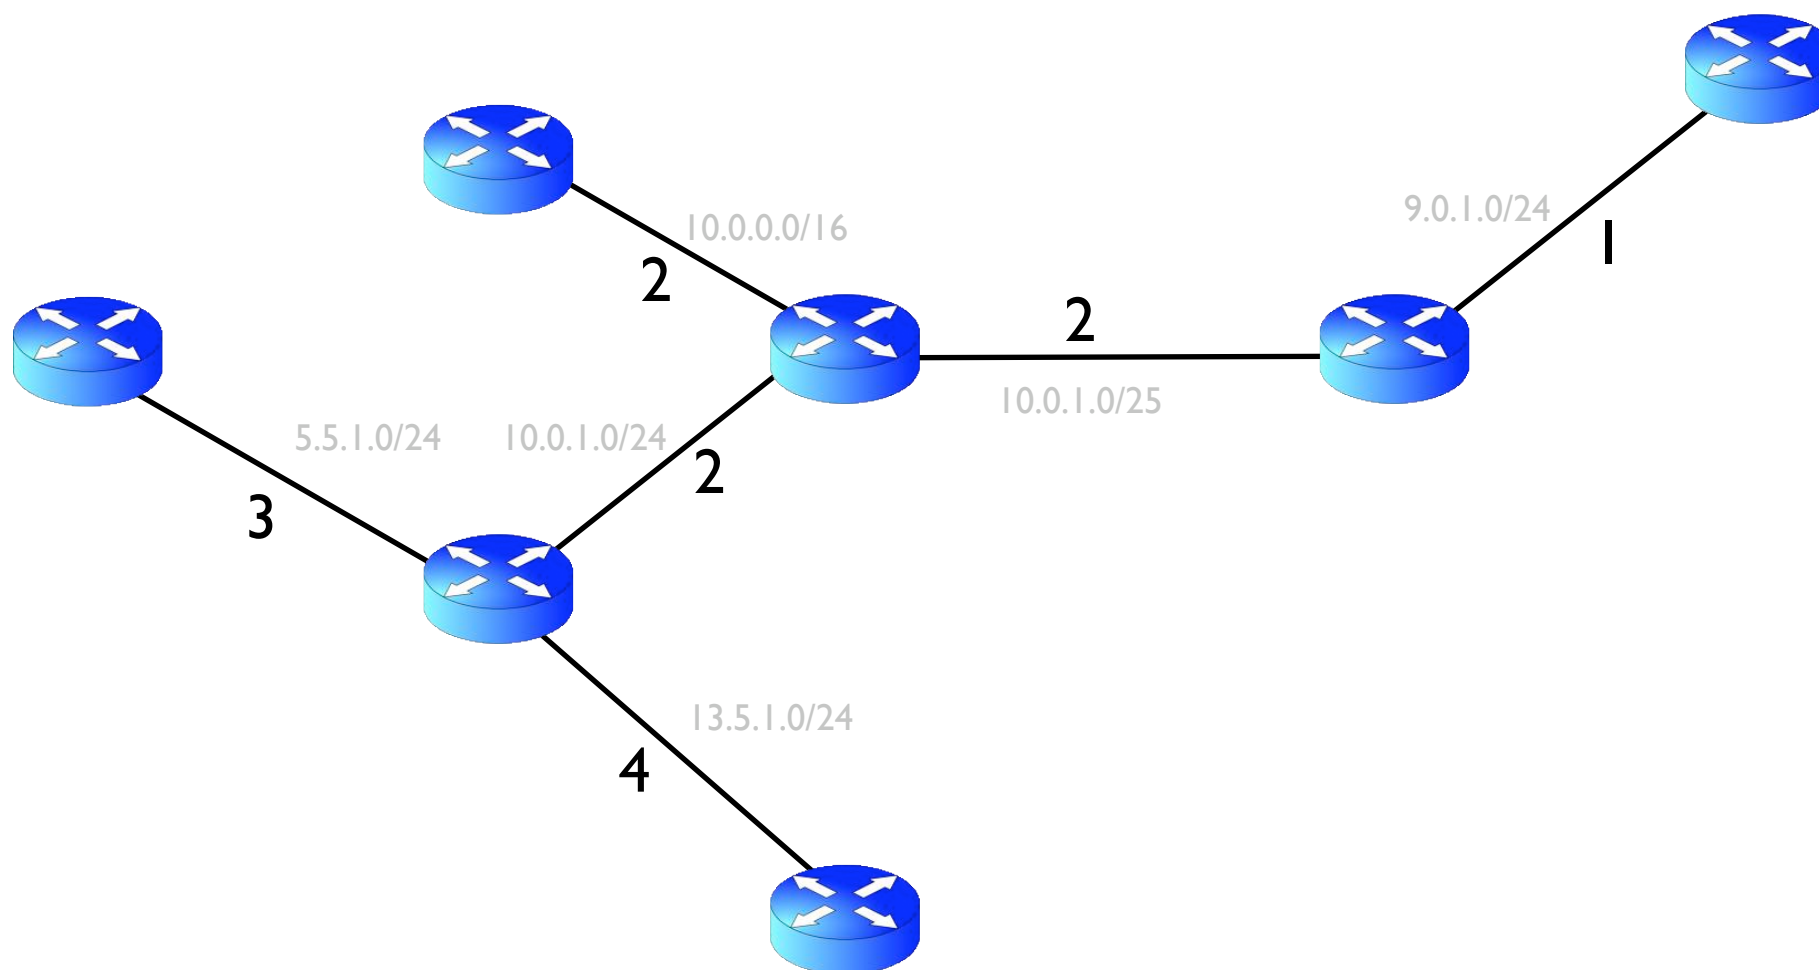




Assigning AS to Routers

Router graph with AS assigned to routers.

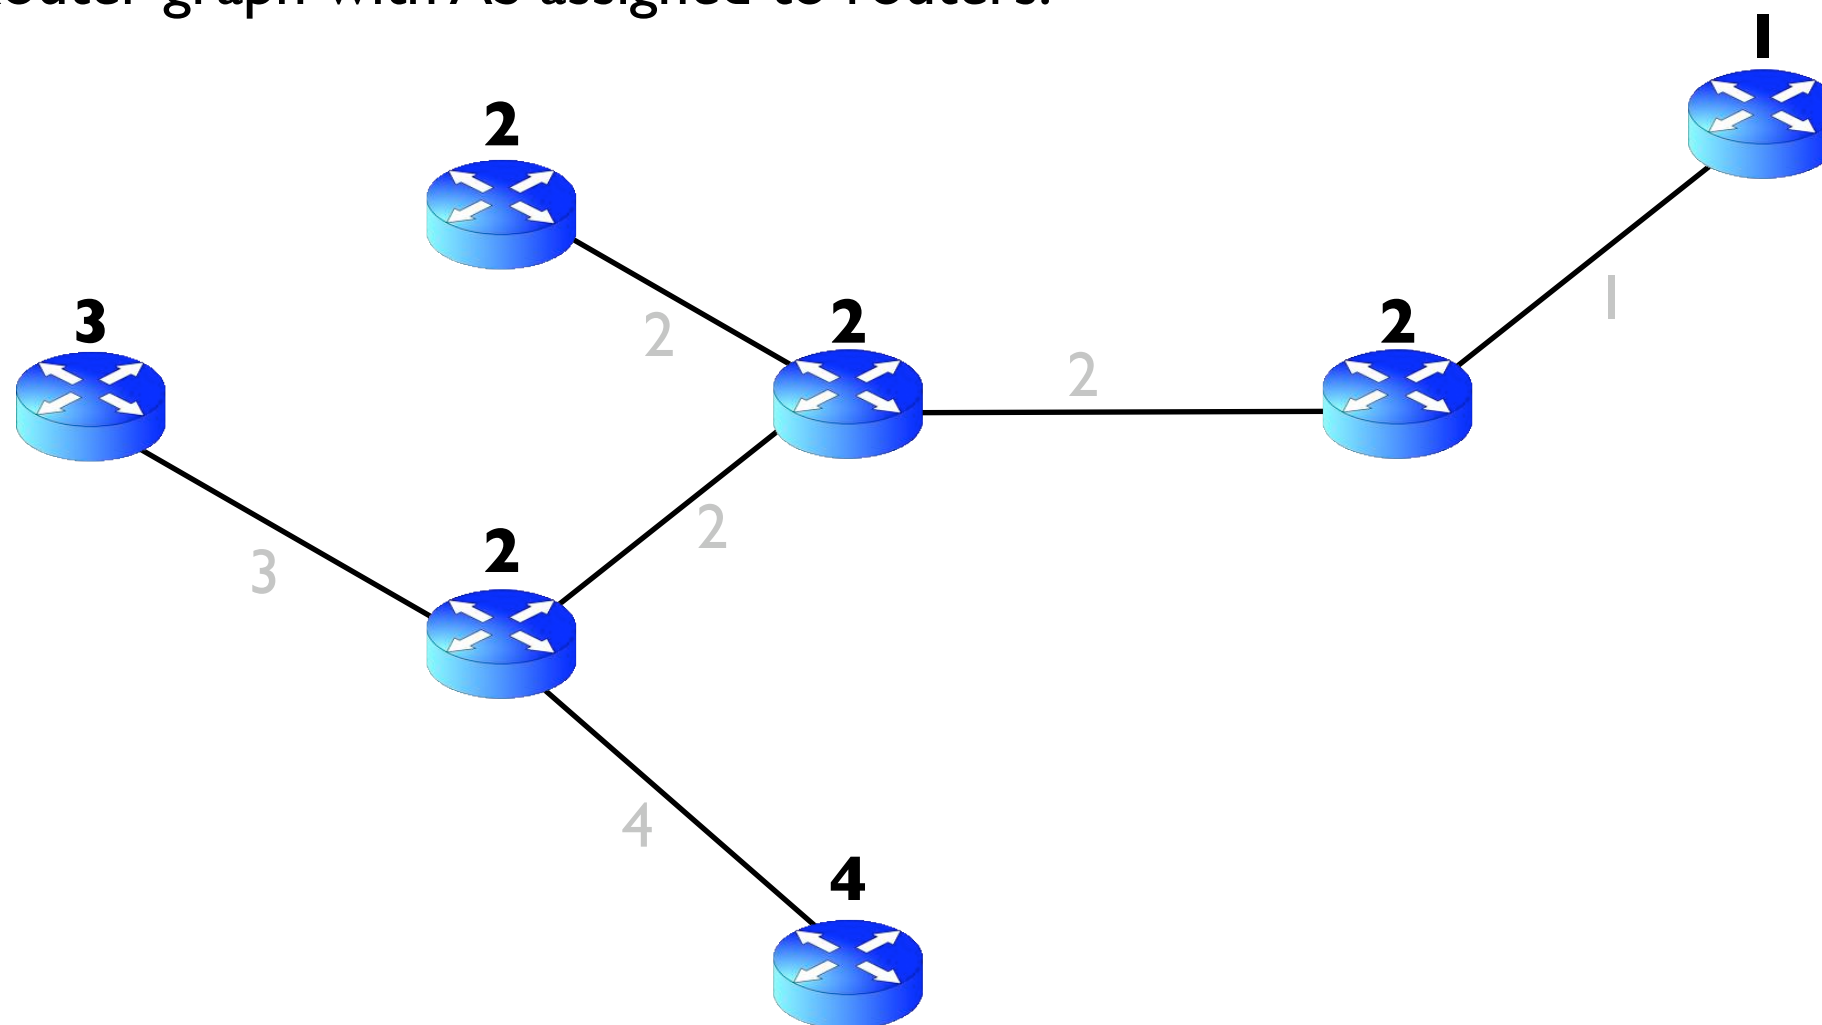





caida

Dual Graph

motivation

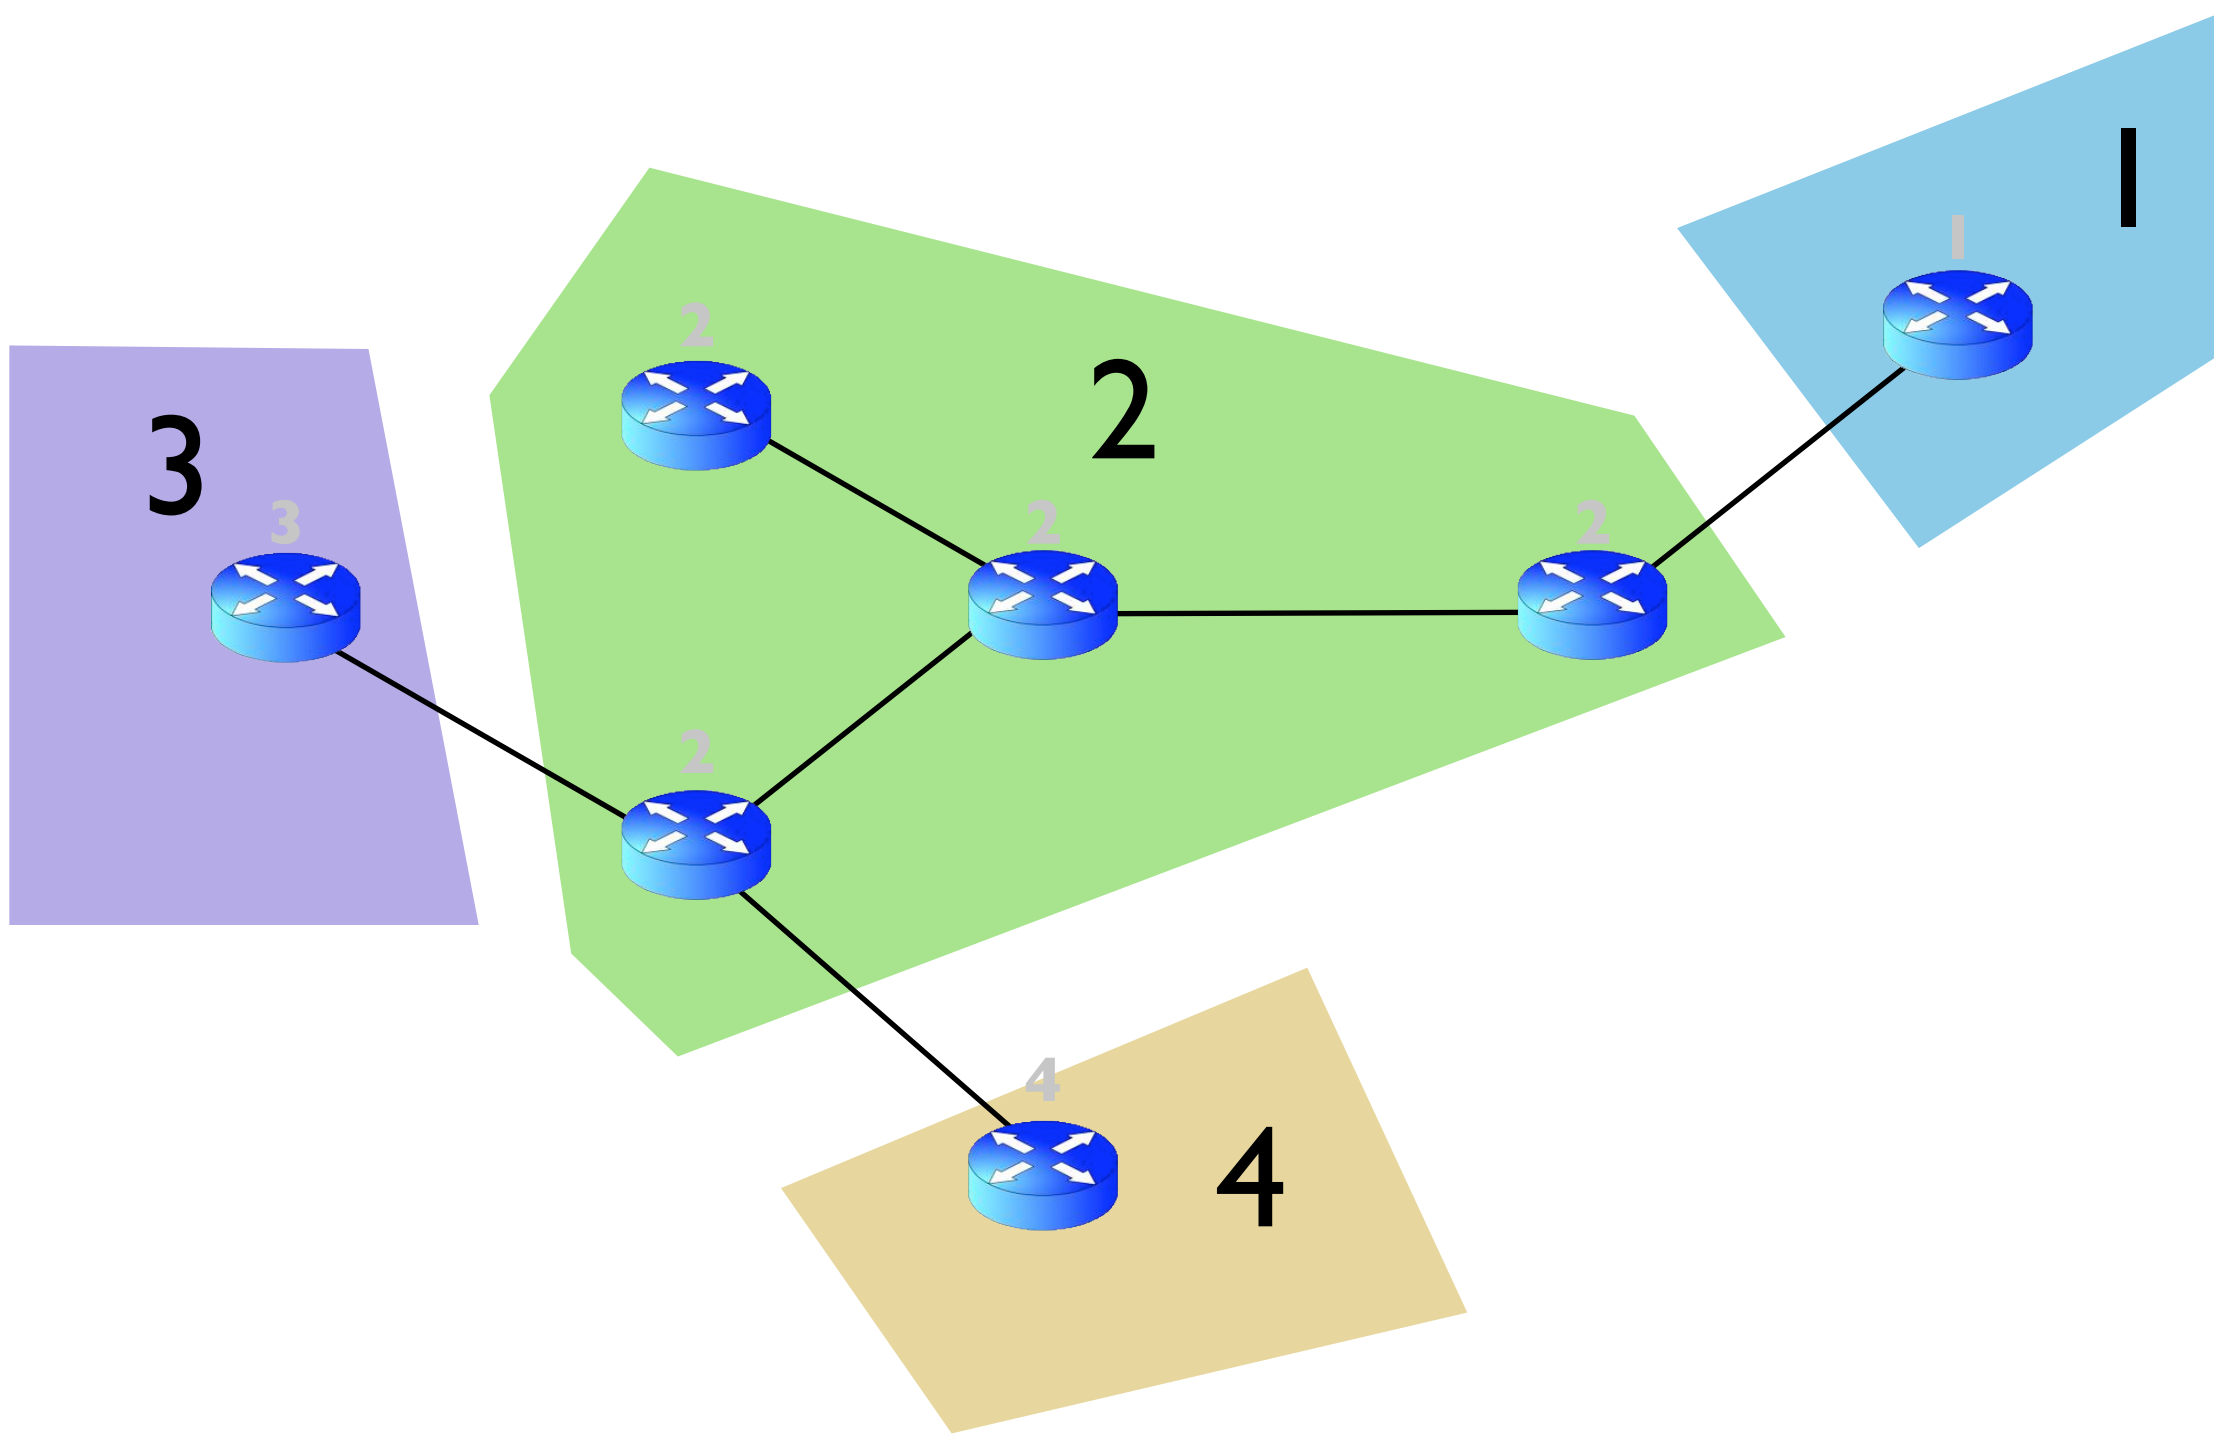




caida

Methodology

methodology

We compared the success rates of four different AS assignment heuristics against our ground truth data sets.



Ground Truth

methodology

- **ISPs (i)**

- Tier 1, Tier 2, and five research networks

- **interface sets**


- I_i interfaces in the address space of ISP_i , on routers that do belong to ISP_i
- \bar{I}_i interfaces in the address space of ISP_i on routers that do **not** belong to ISP_i

- **router sets**

- R_i is the set of routers with interfaces in the address space of ISP_i that do belong to ISP_i
- \bar{R}_i is the set of routers with interfaces in the address space of ISP_i that do **not** belong to ISP_i

- **AS sets**

- A_i is the set of ASes that do belong to ISP_i
- \bar{A}_i is the set of ASes that do **not** belong to ISP_i




Ground Truth

methodology

	R routers owned	$\bar{\mathbf{R}}$ routers not owned
Tier 1 ^{f,h}	3,405	2,254
Tier 2 ^h	241	86
GEANT ^f	37	0
I-Light ^f	32	0
Internet 2 ^f	17	0
National LambdaRail ^f	16	0
CANET ^f	8	0

^f Organization provided **full** interface list
^h Organization provided naming **h**euristic that allowed for inference of **R**



Data sources


methodology

- Router Graph (MAARS¹)
 - Sept. - Oct. 2009
 - 268 million traceroute paths
 - 22 million nodes² / 22 million links³
- BGP Data
 - Oct. 2009
 - 311,230 prefixes
- AS relationships
 - Oct. 2009
 - BGP data
 - 148,565 AS relationship pairs

¹ router alias resolver

² node = set of IPs on same router



³ link can connect > 2 nodes




caida

Data Collection Process

methodology

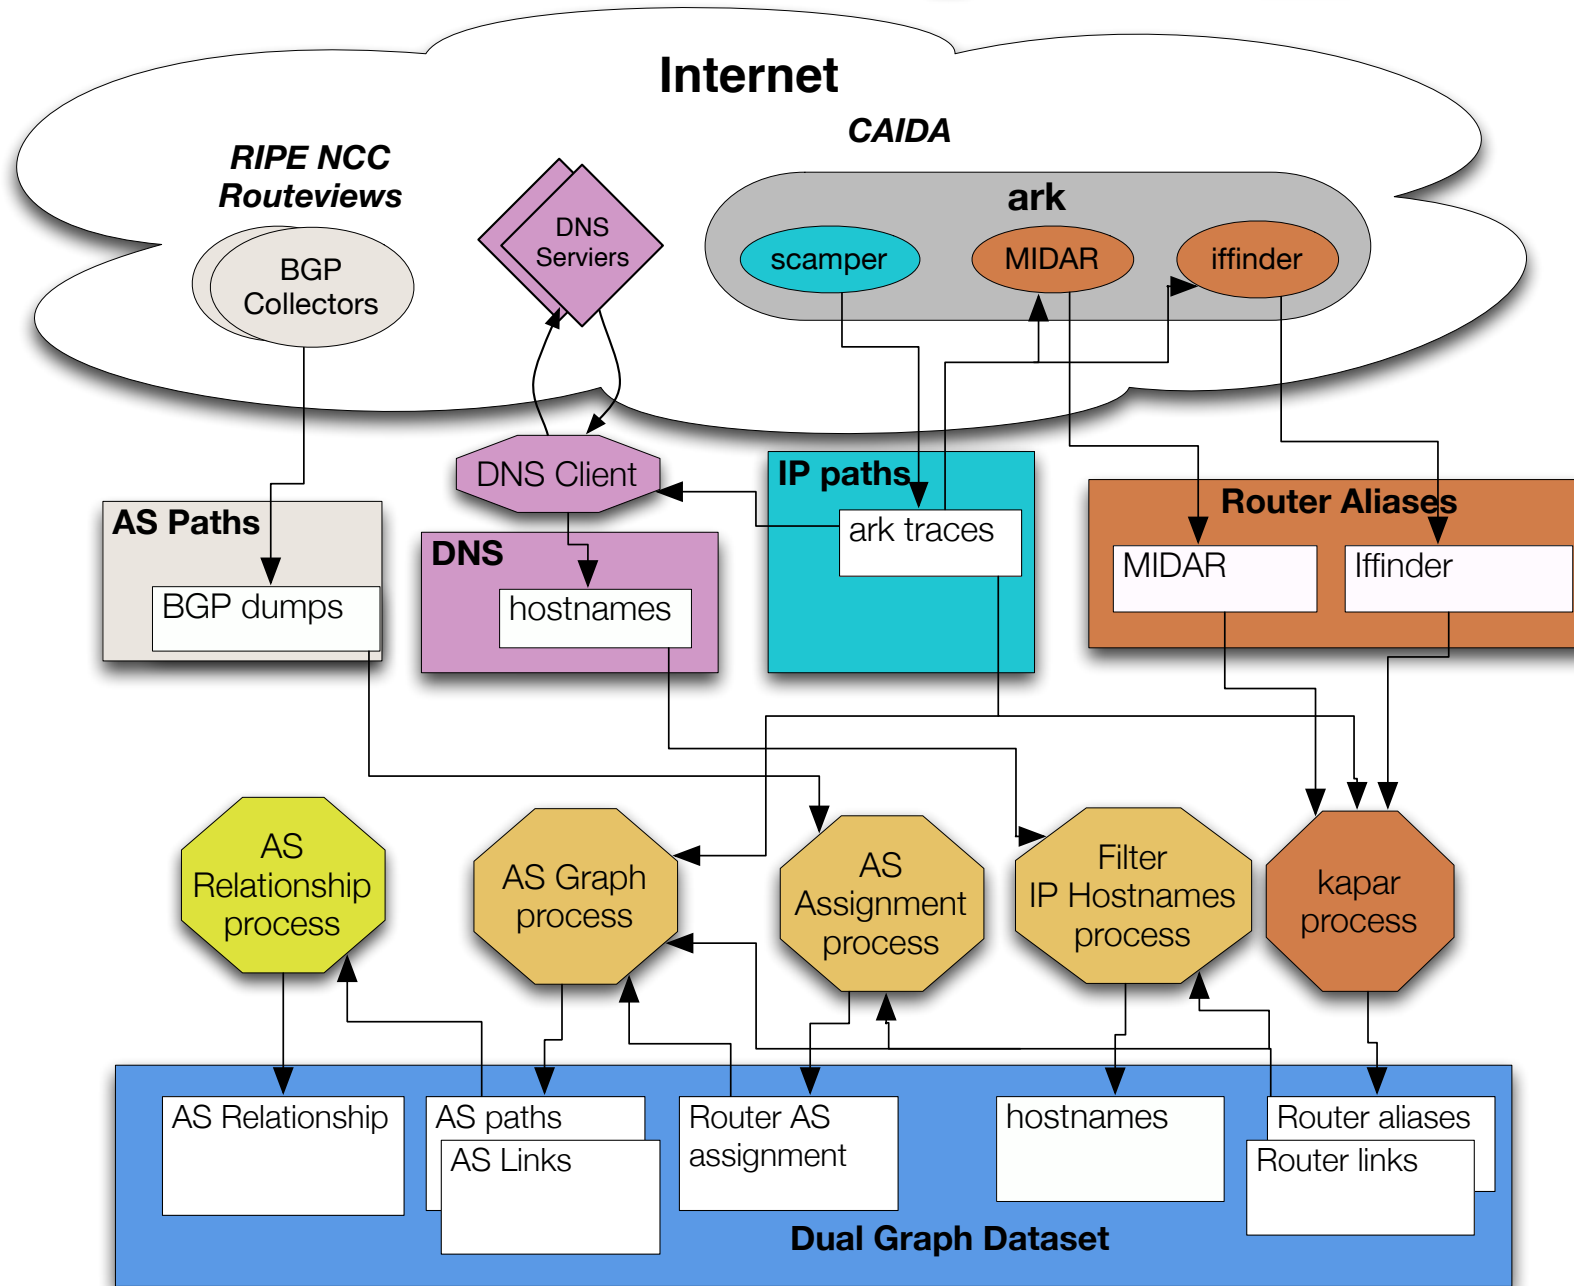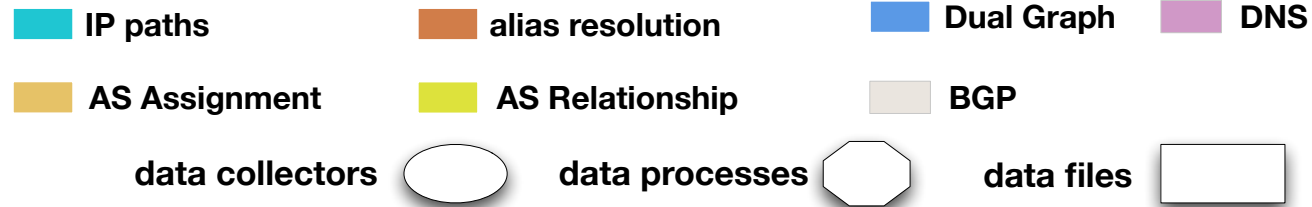



Data Topology

caida

methodology


Interface sets	
I_{I2}	10.0.1.1, 10.0.2.3, 10.0.1.6
\bar{I}_{I2}	10.0.1.28

router sets	
R_{I2}	b, d, f
\bar{R}_{I2}	a

AS sets	
A_{I2}	12
\bar{A}_{I2}	4, 2, 7

route	AS	type
a	12	single-AS
b	4, 12	multi-AS
c	4	single-AS
d	2, 12	multi-AS
e	12	single-AS
f	12, 7	multi-AS


as	address space	color
2		purple
4		blue
7		red
12		green

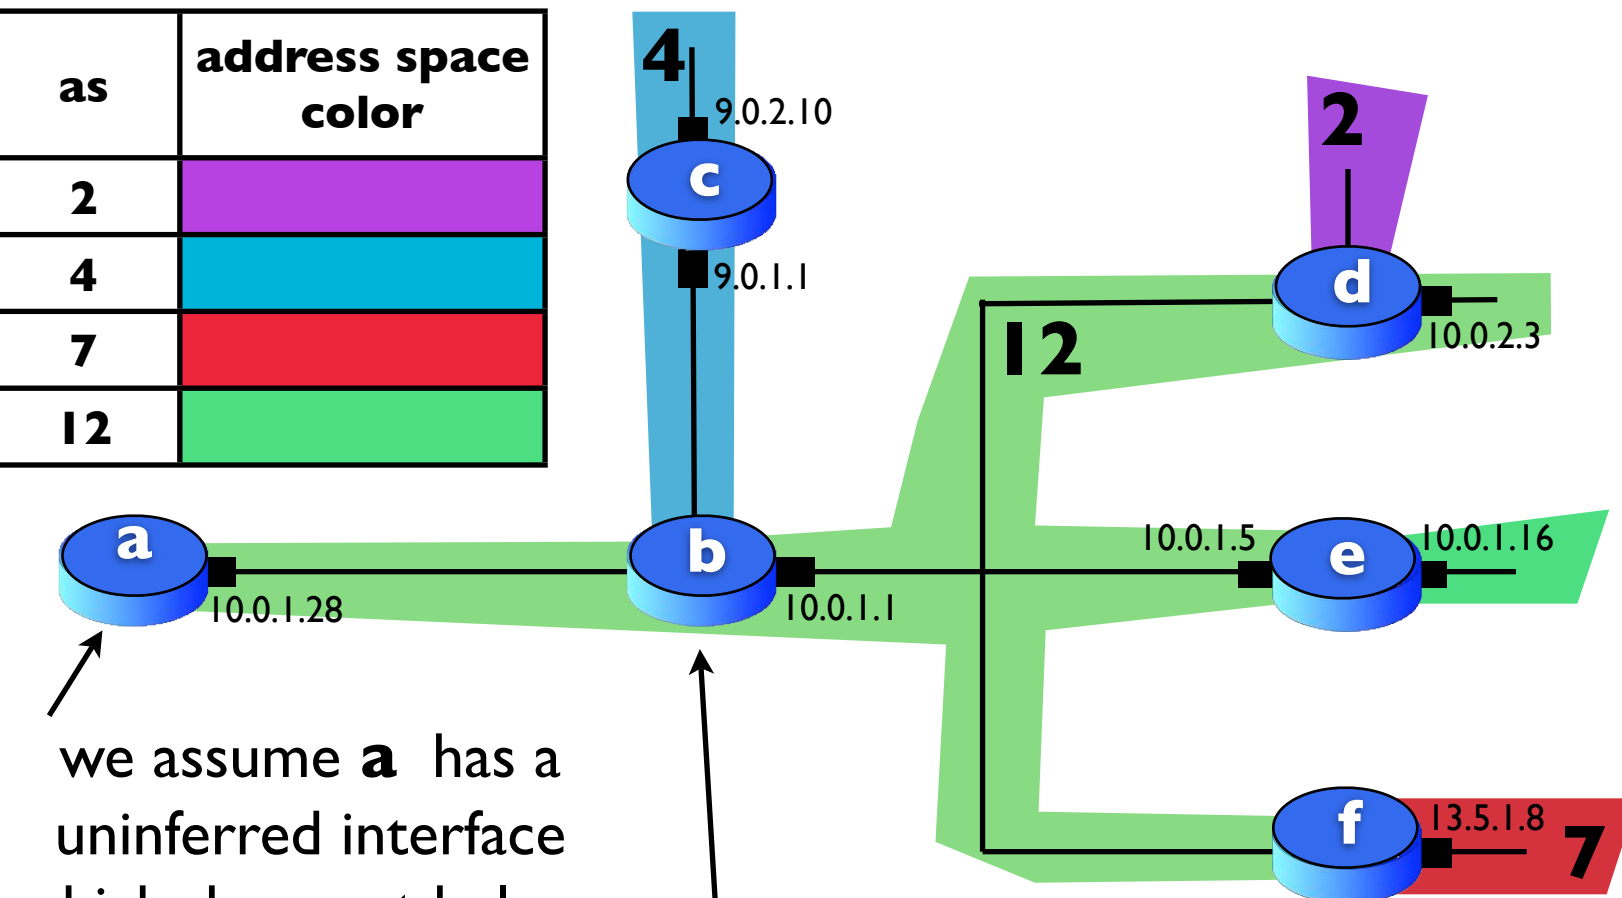

we assume **a** has a uninferred interface which does not belong to **12**

b gets candidate AS from its interface 10.0.1.1 and the link it shares with **c**.

f has no interface in I_{I2} and \bar{I}_{I2} , so has no known ownership




AS assignment methods


caida

methodology




Single



Election



Neighbor

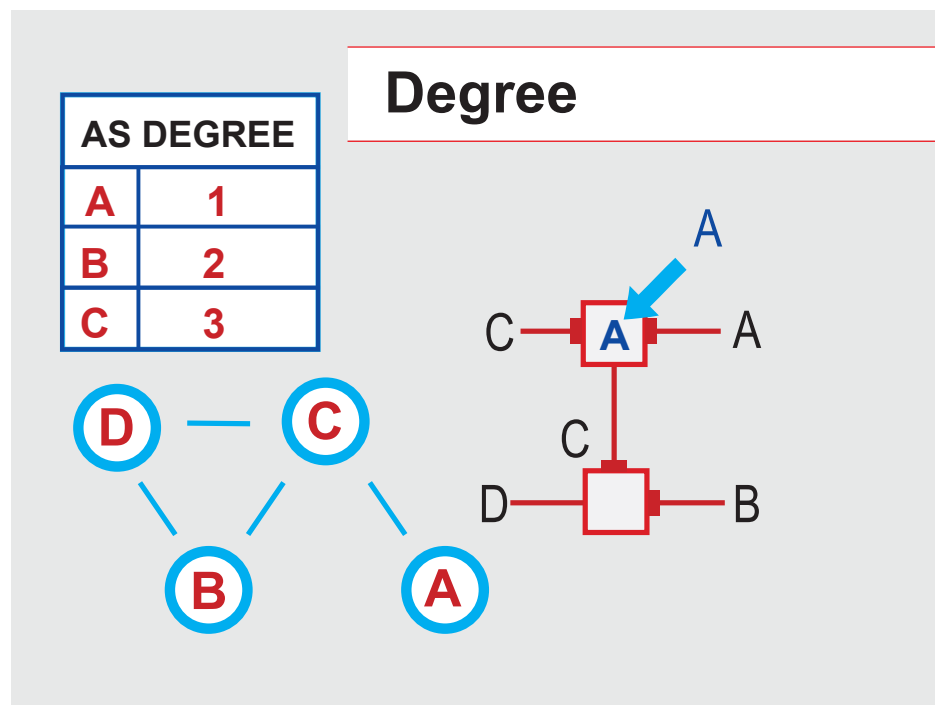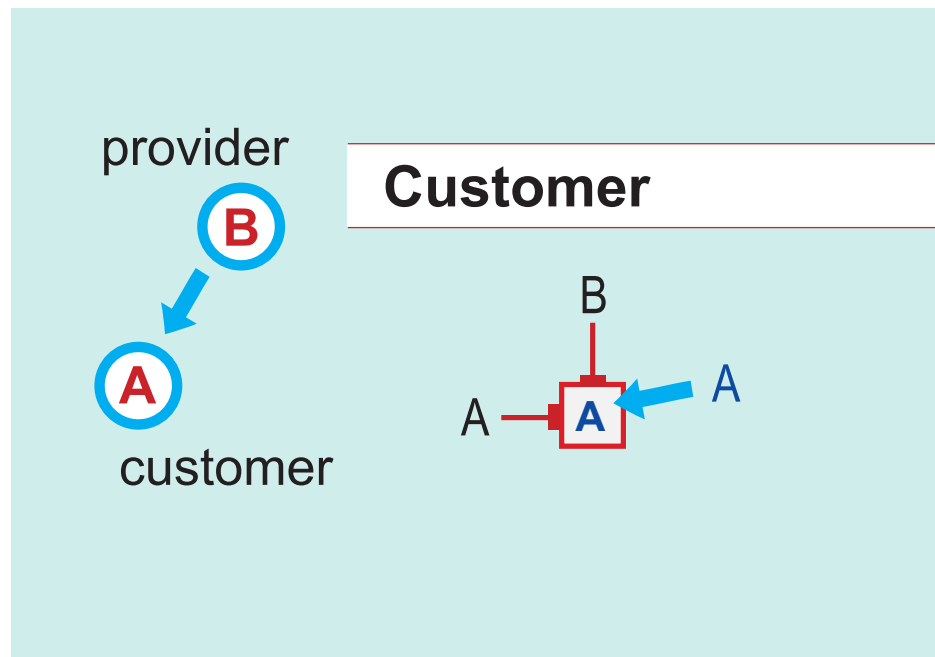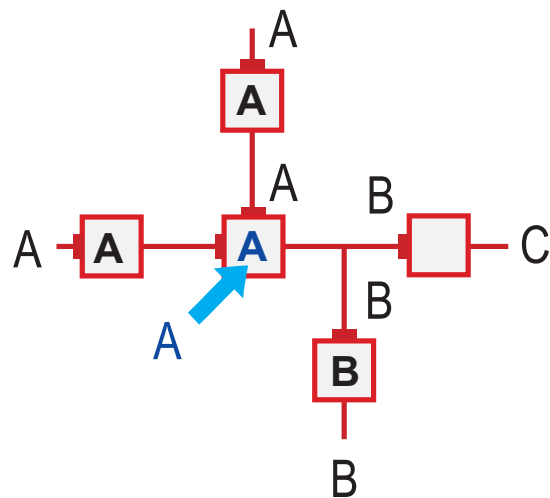

Single: only one choice

Election: most interfaces

- more links into router's ISP's address space

Neighbor: most single AS neighbors


- connected to more routers owned by the router's ISP

Customer: customer AS

- customer's router uses provider's address space for the interconnect


Degree: smallest degree AS

- proxy for Customer, large degree AS typically is provider of small degree AS



- primary method
 - assignment is used if it is not ambiguous
- tie-breaker method
 - method with highest success rate on routers for which primary method yields ambiguous results

	ambiguous
election	no majority AS among links
neighbor	no majority AS among neighbors
customer	no unambiguous customer relationship among ASes
degree	tie between smallest degree ASes



successful assignment:


If router r is known to be owned by ISP_i and method $H(r)$

selects an AS owned by ISP_i ,

or

if r is known to not be owned by an ISP_i and method $H(r)$



selects an AS not owned by ISP_i .



Method Success Rates

analysis


S - success rate
F - failure rate

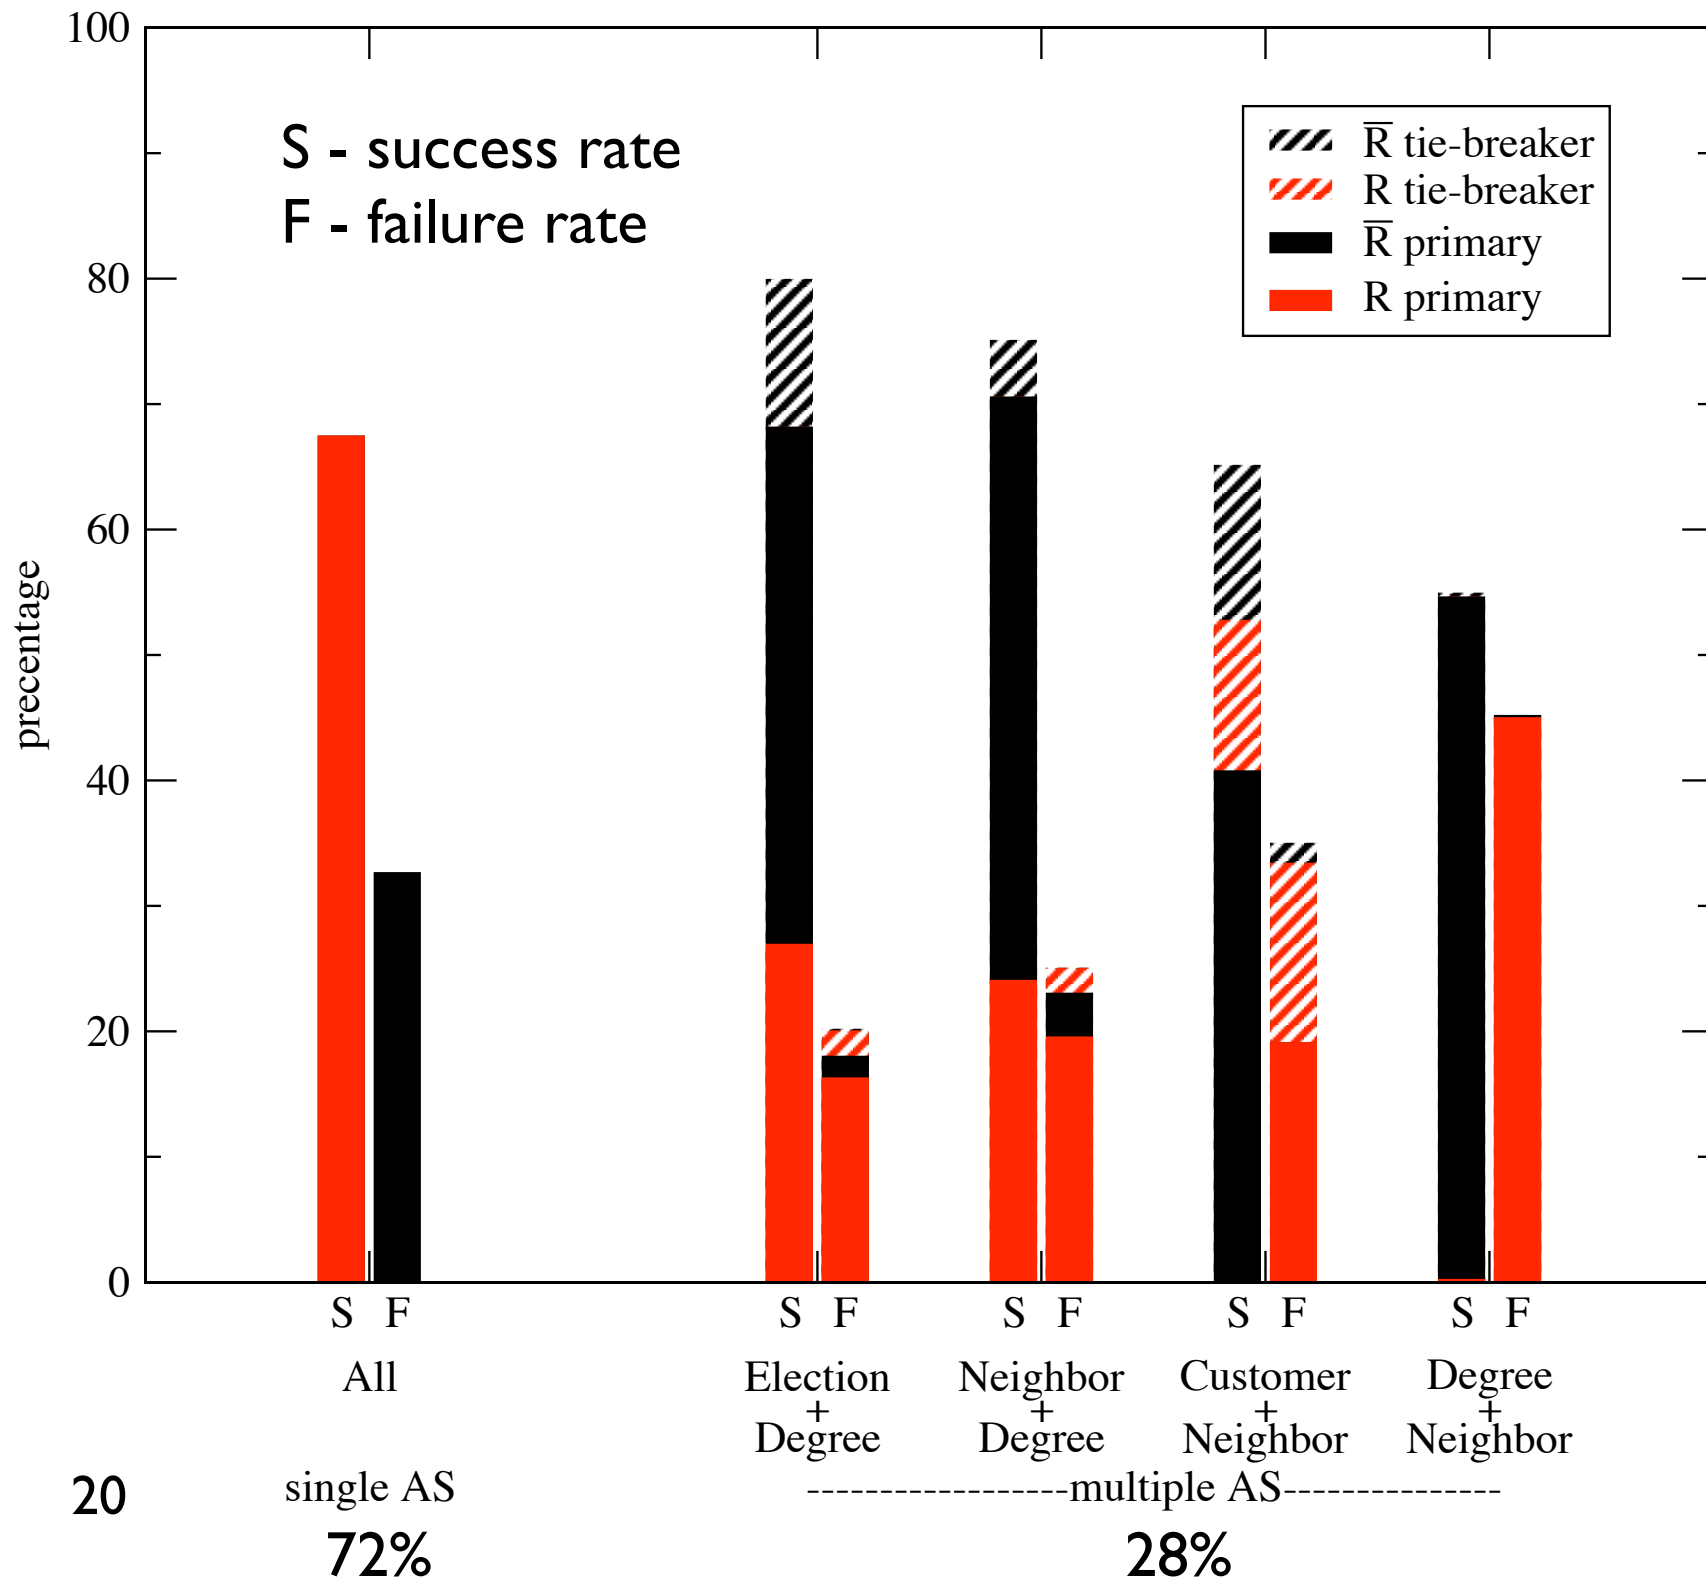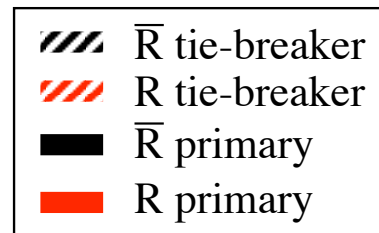

Election + Degree performs best with **80% success** rate.

Tier I bias in ground truth reduces accuracy of customer and degree heuristics

Tie-breaker ambiguous assignments not counted





Success Rates

- single AS routers

- all methods successful for R (67% of single AS routers)
- all methods fail for \bar{R} (33% of single AS routers)

routers in \bar{R}_i must have an interface in A_i , therefore single AS routers only have an AS in A_i , making it impossible for any method to select an AS in \bar{A}_i .

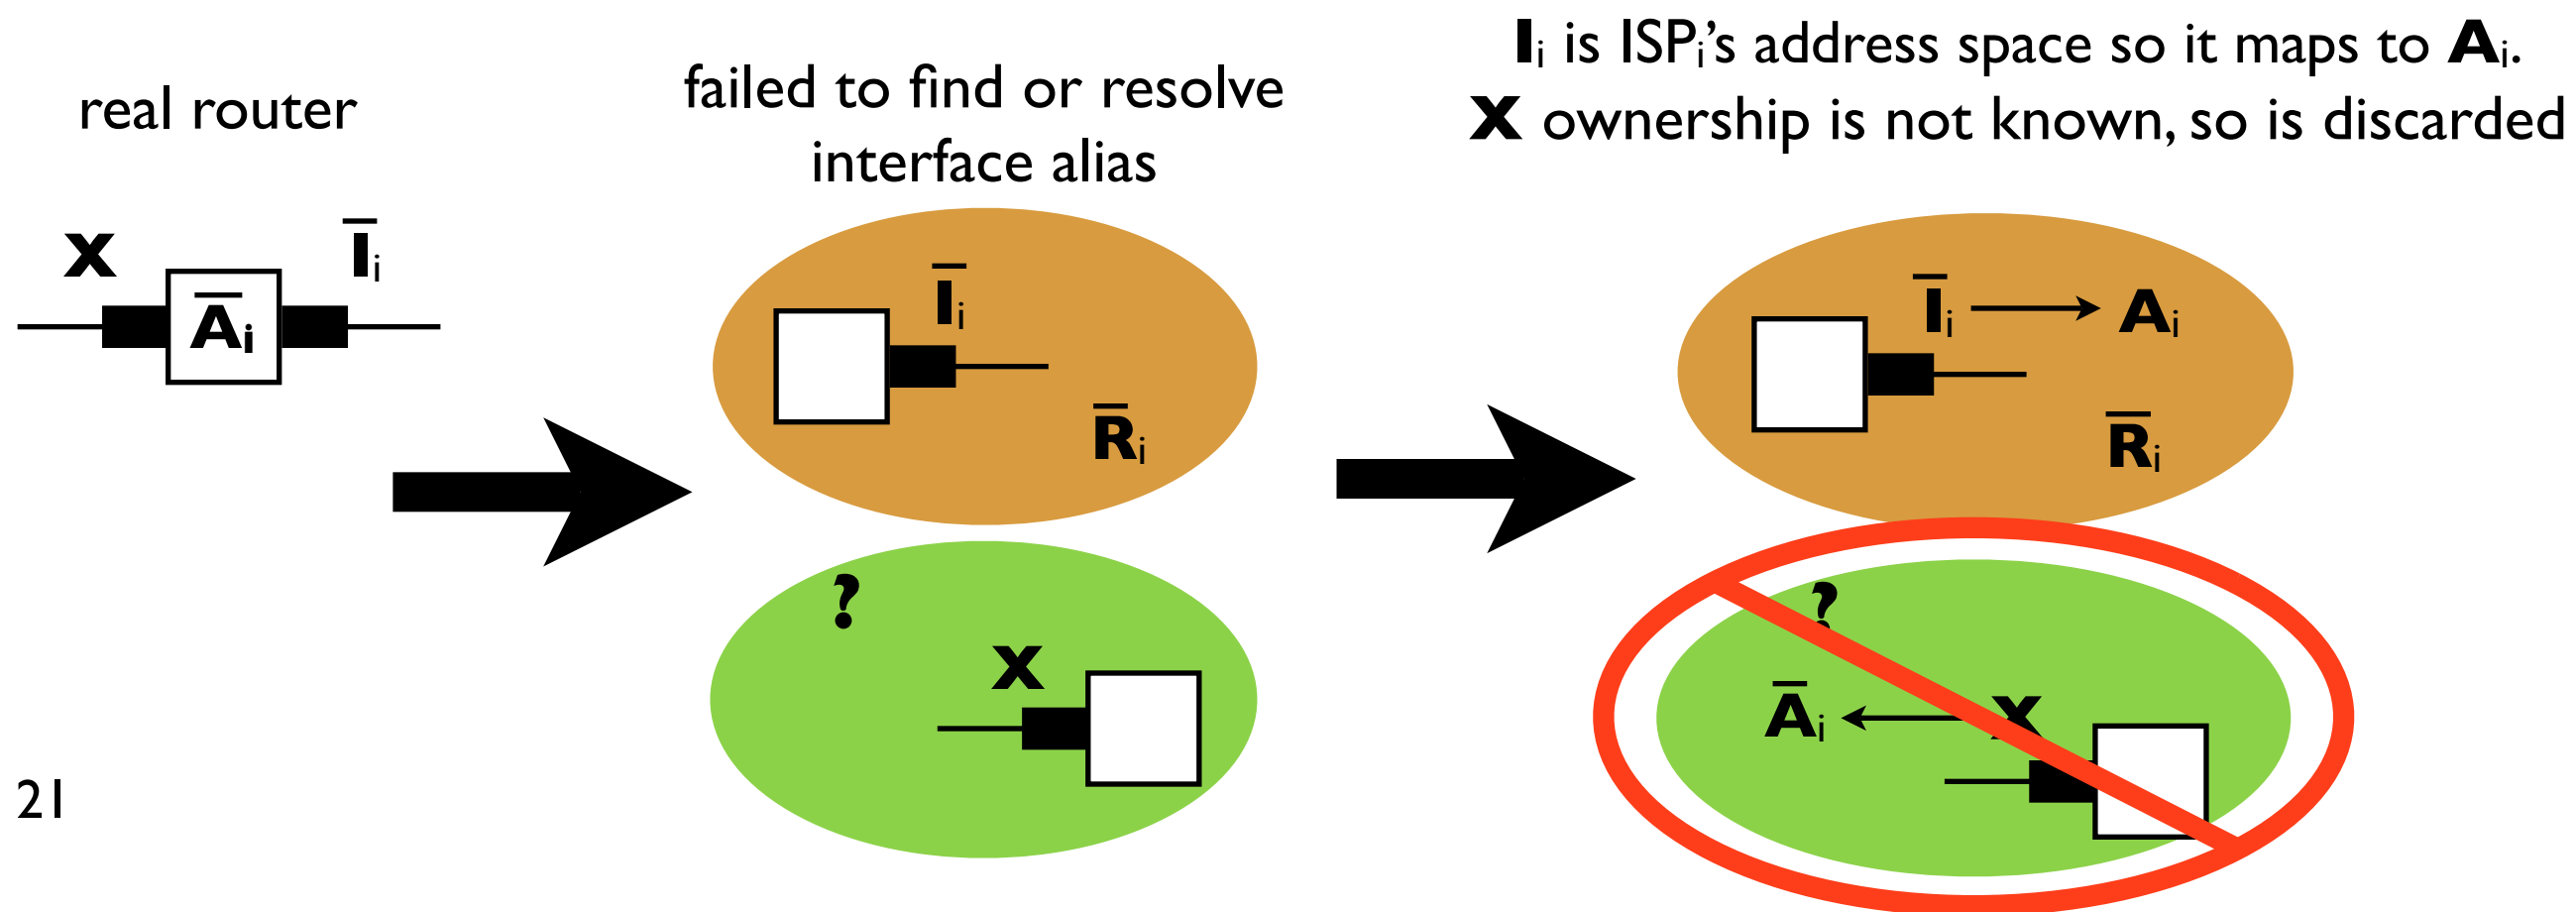




Success Rates

analysis



- multiple AS routers (28%)
 - **Election + Degree** best with **80% success** rate.
- single AS routers (72%)
 - all methods successful for R (67% of single AS routers)
 - all methods fail for \bar{R} (33% of single AS routers)
- overall
 - **Election + Degree** best with **70% success** rate.




caida

Analysis of Dual Topology

analysis

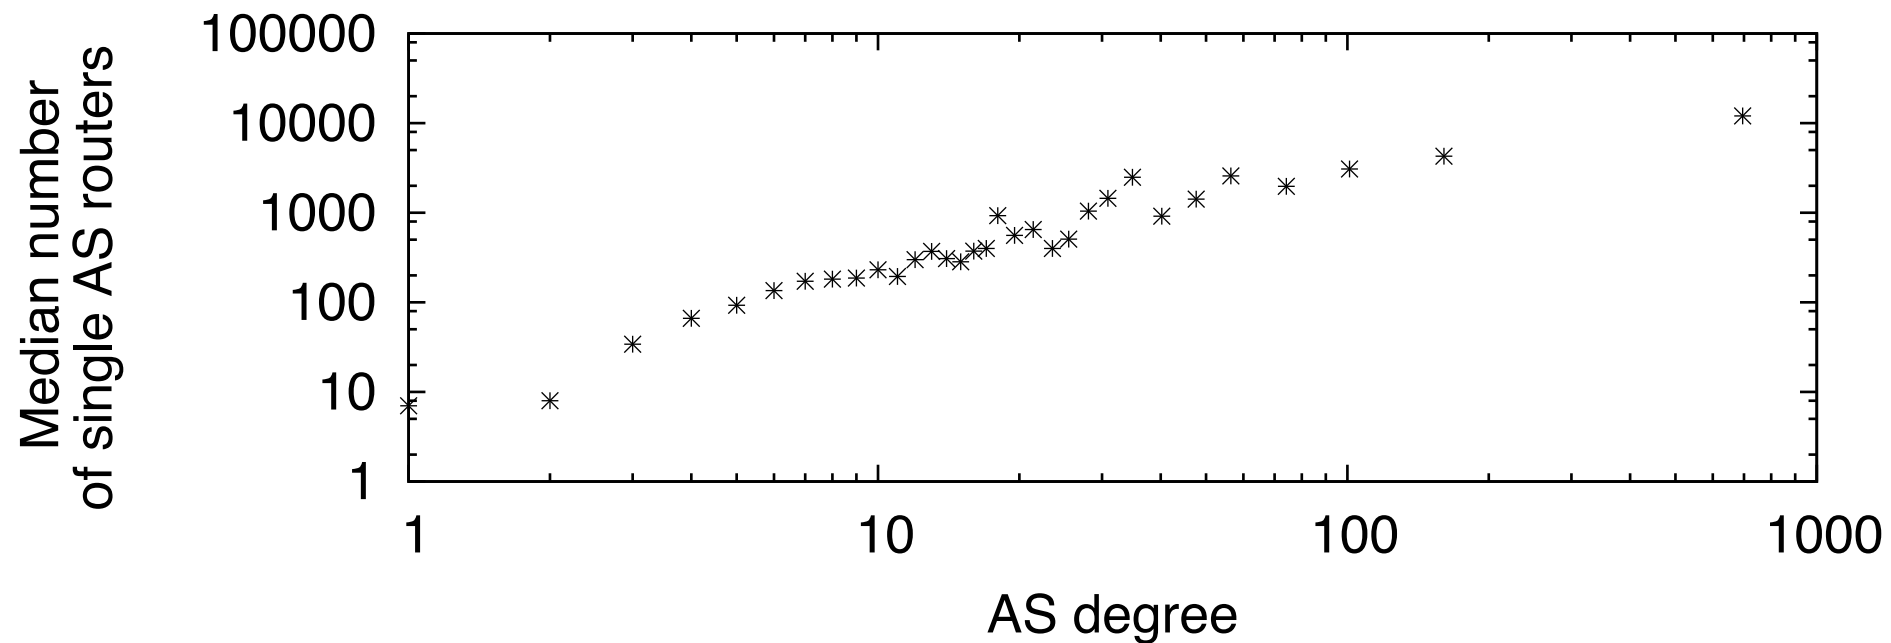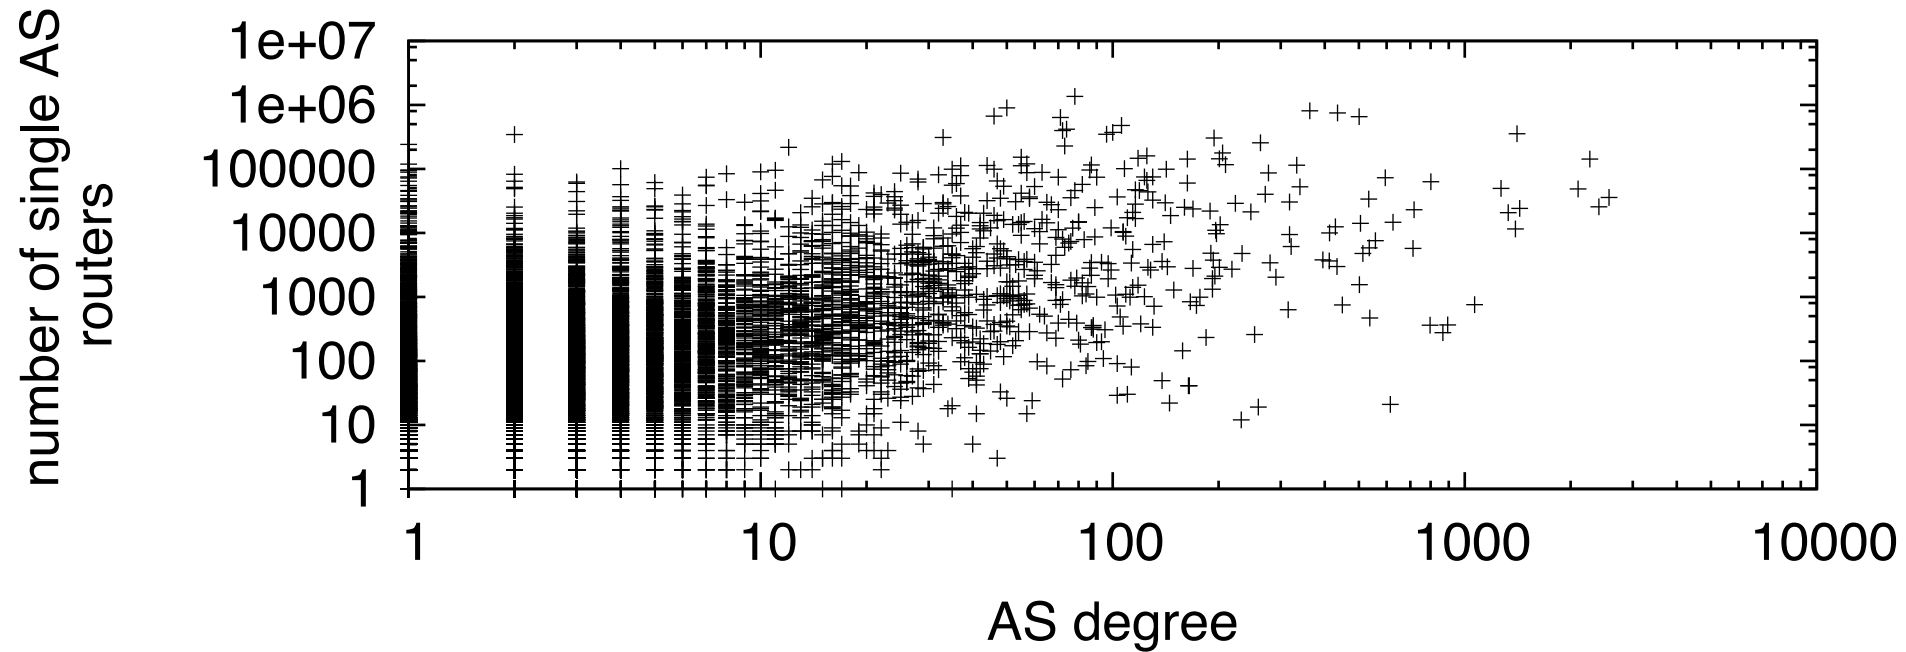


statistical correlation that we can use for topology scaling and generation




Heuristic Effect on AS Router Count

how do different heuristics affect number of inferred routers per AS

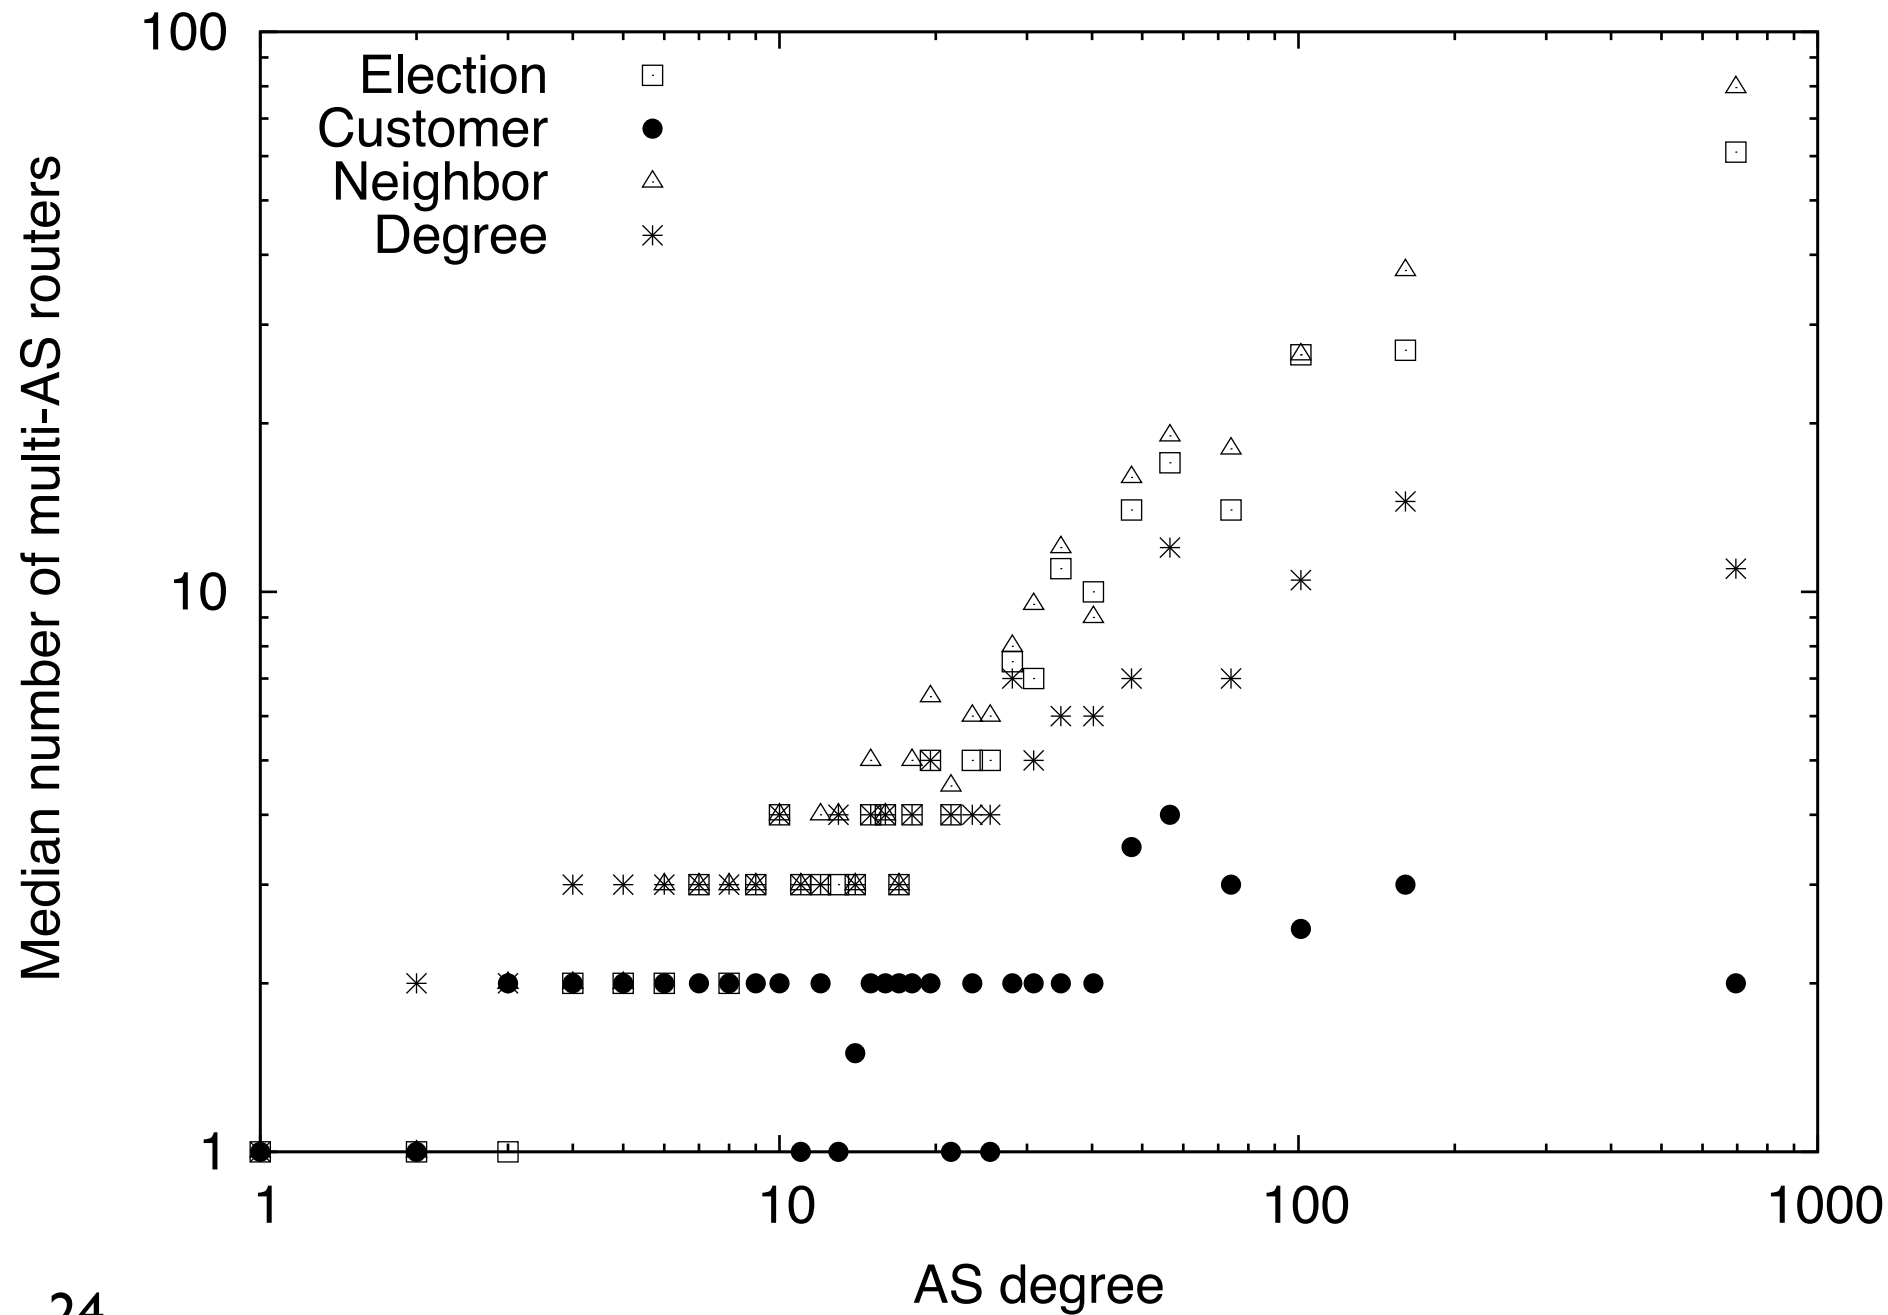

Neighbor assigns more nodes to large degree ASes

Customer assigns more nodes to small degree ASes




Resolving AS Loops


caida

analysis

interface/link path

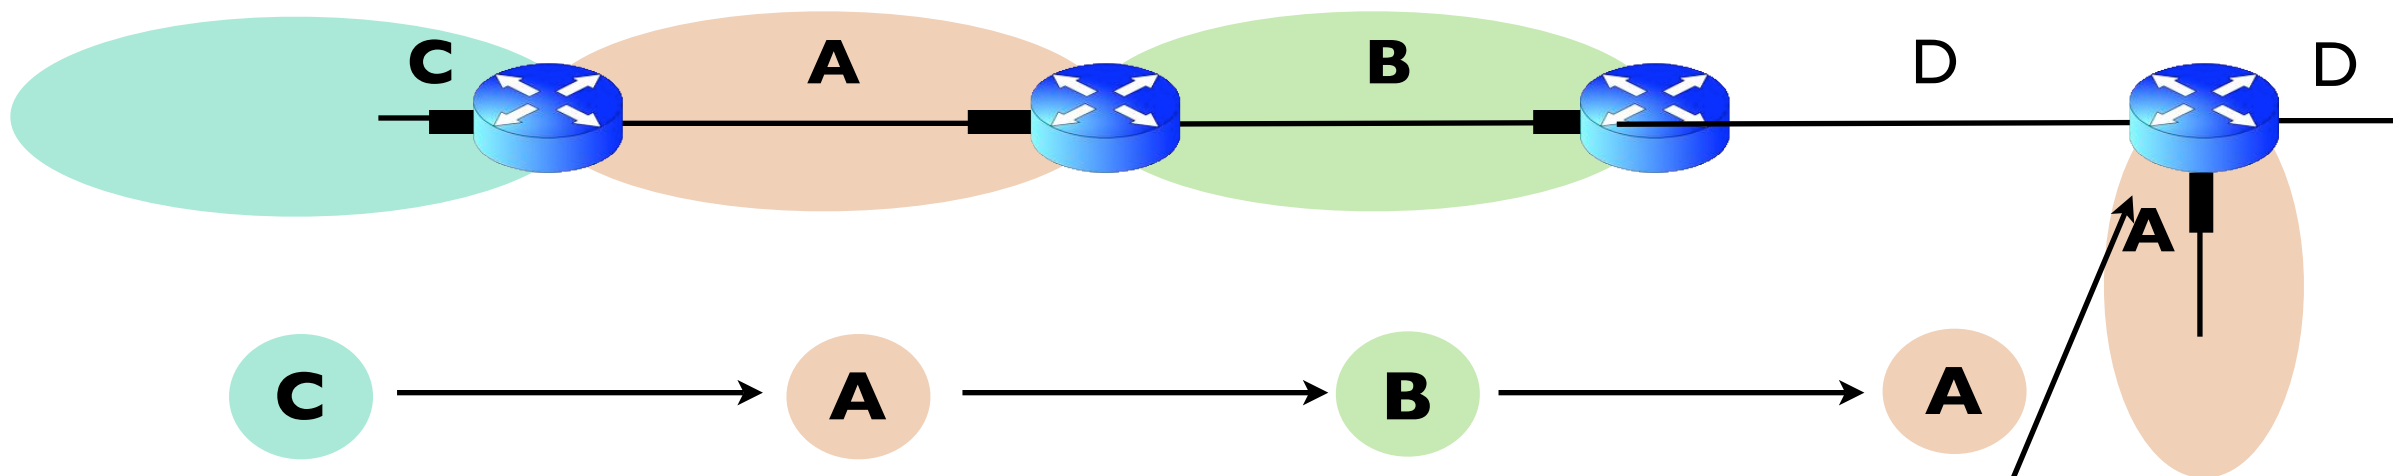

packet received on D, but
response sent from A




Resolving AS Loops

caida


analysis


interface/link path

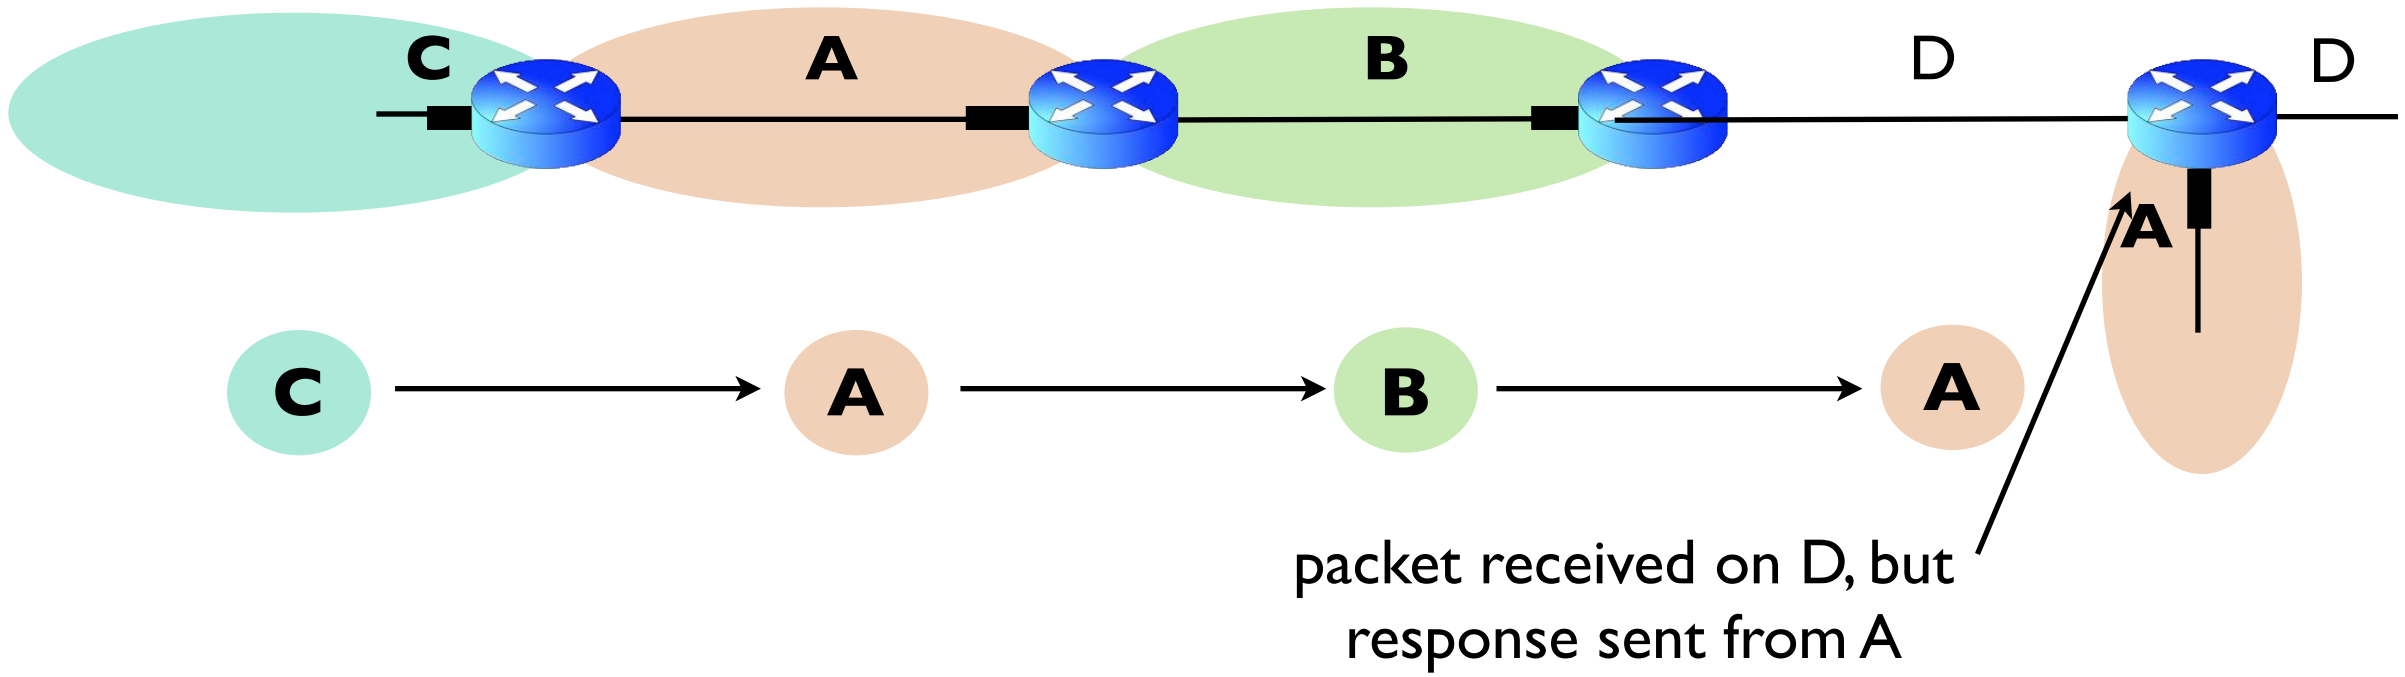


router path

Using inferred AS assignments resolves apparent AS loop.

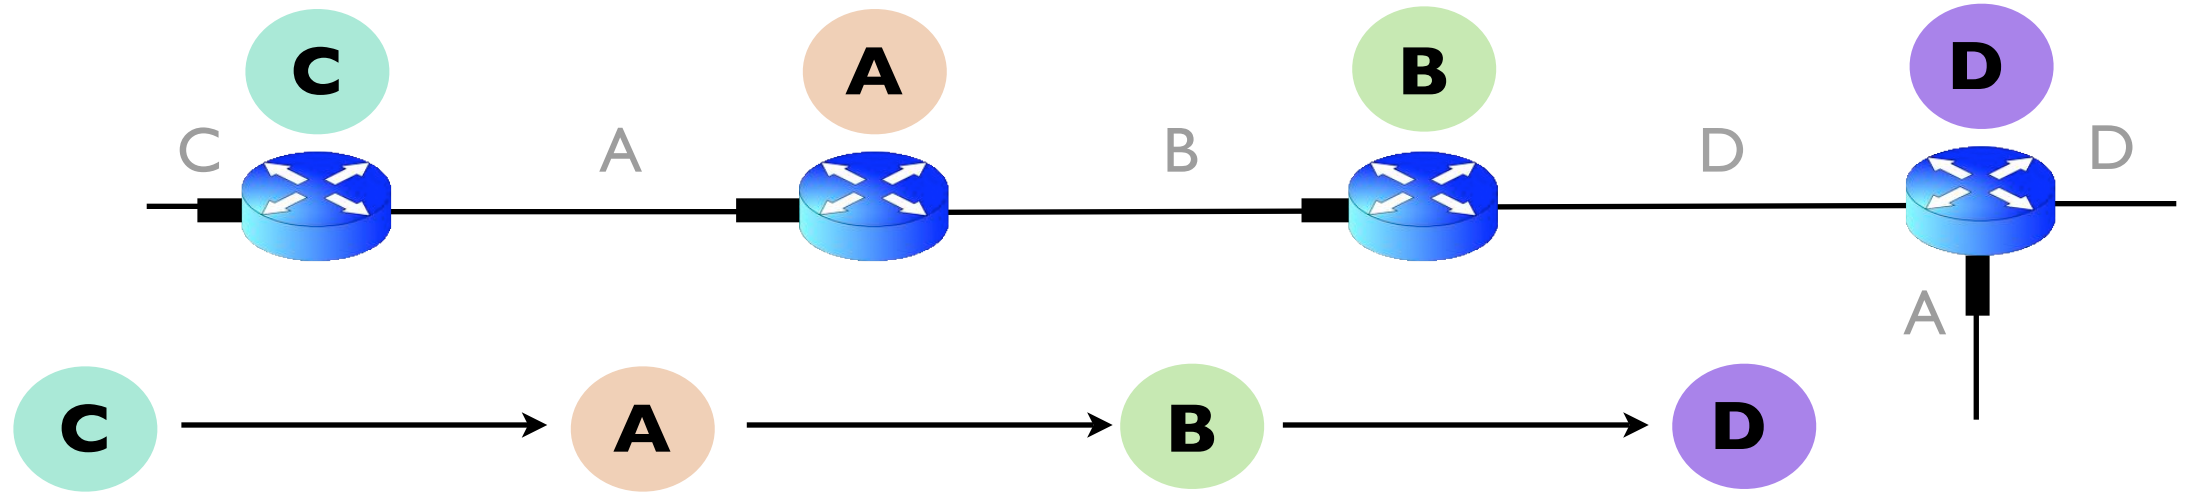




Resolved AS Loops

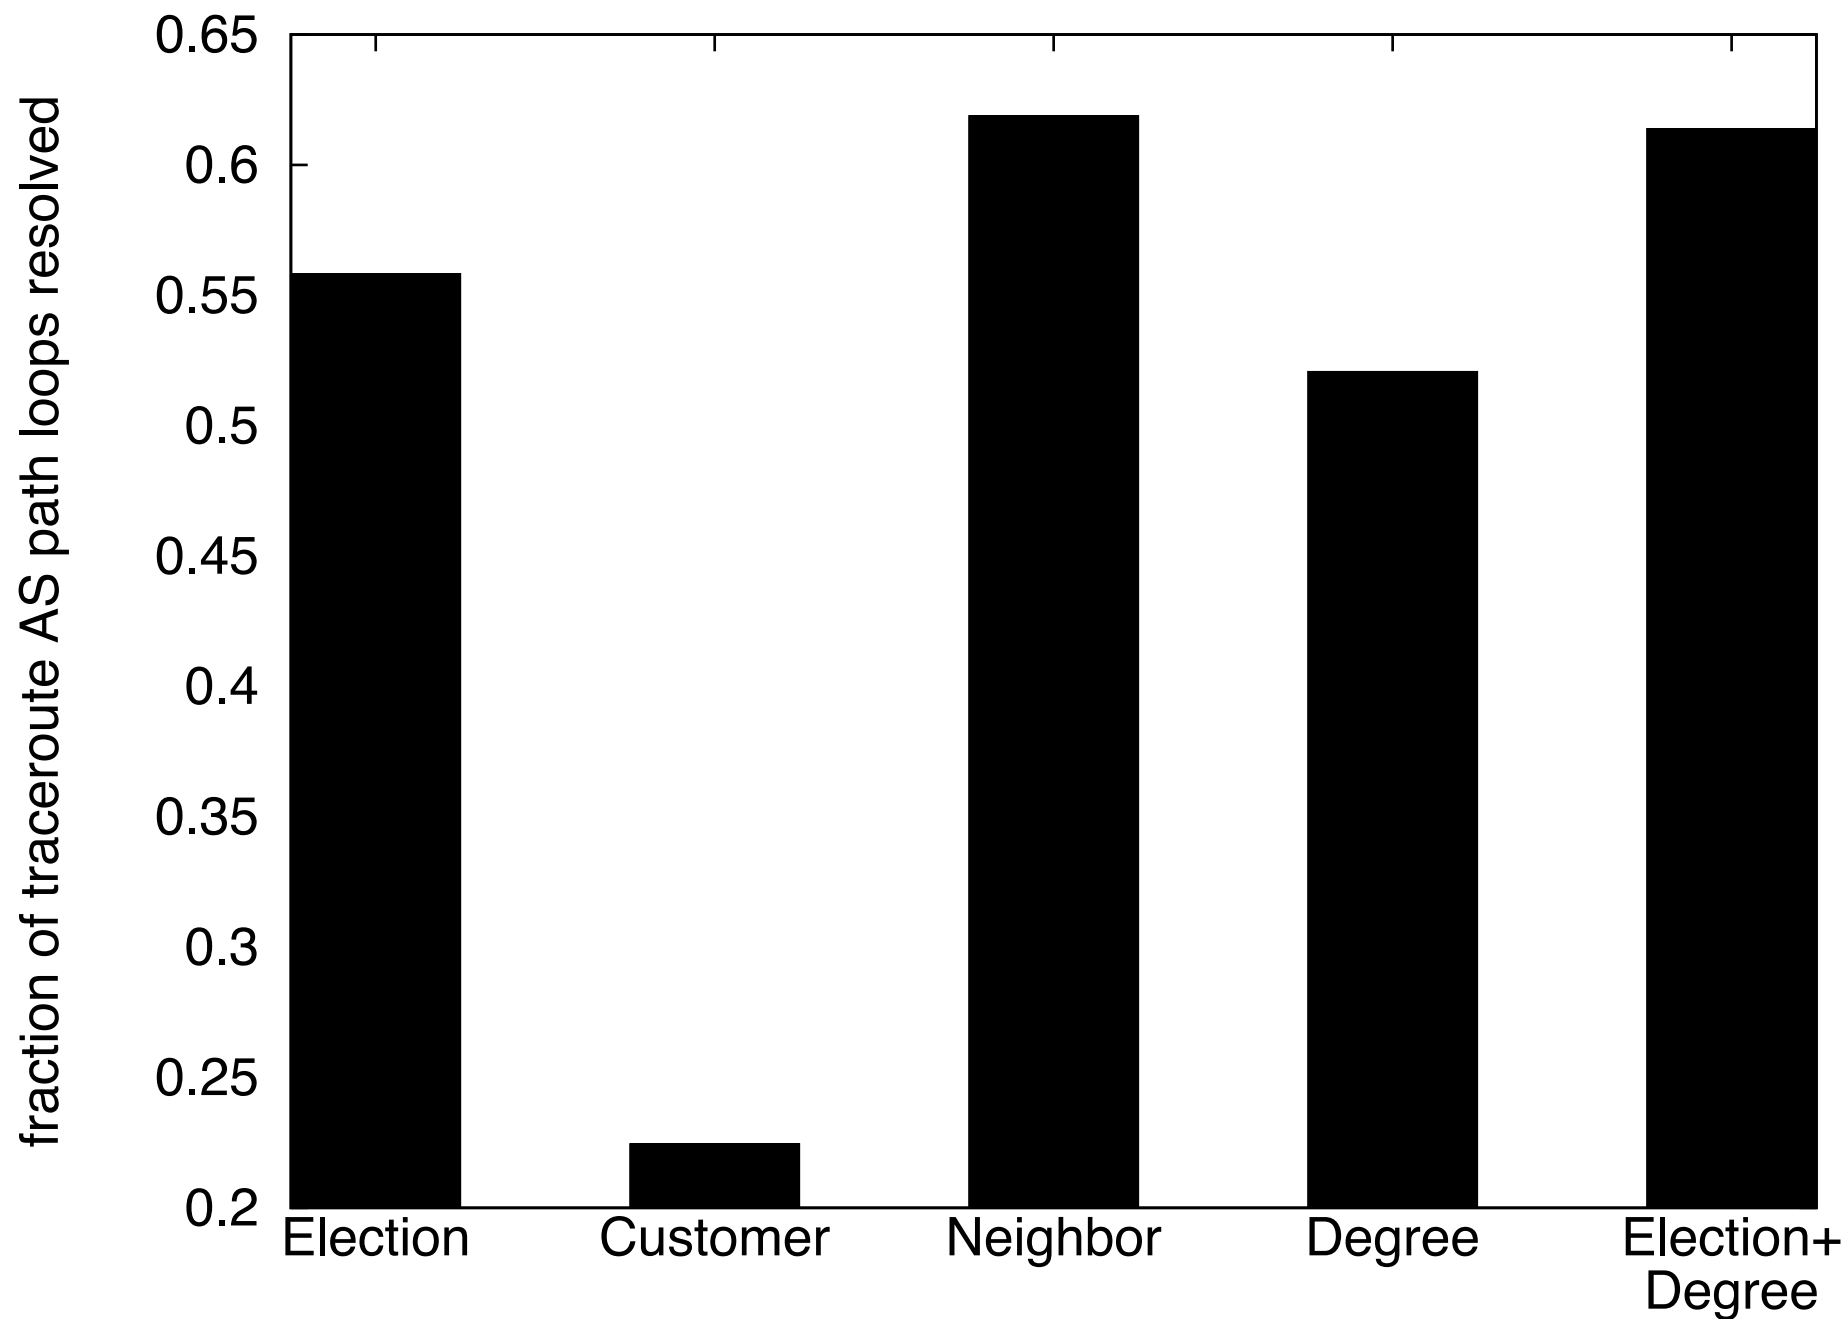

Neighbor resolved the most loops with 63%.

Election+Degree (the combination with the greatest success rate) resolves **62%** of AS loops


~5% of paths contain AS loops, depending on the monitor.



Conclusion

conclusion

- multiple AS routers
 - **Election + Degree** best with **80% success** rate.
- all routers
 - **Election + Degree** best with **70% success** rate.
- AS loop resolution
 - **Election+Degree resolves 62%** or AS loops



Future Work/What we need

future work

- More ground truth
- alternative AS assignment heuristics

Bradley Huffaker bradley@caida.org

PAPER: http://www.caida.org/publications/papers/2010/as_assignment/

DATA: http://www.caida.org/publications/papers/2010/as_assignment/supplemental